



12" MONITOR

ORL0411000

Monitor 12" RLED R4

- 12-30 V DC
- Prevádzková teplota -40 až +85 ° C
- Rozlíšenie XGA 1024xRGBx768 pixelov



POPIS PRODUKTU

12-palcový monitor je perfektný, keď chcete vidieť viac ako jeden obraz naraz, napríklad, ak chcete použiť Orlaco "Surroundview". Tieto monitory majú stupeň krytia IP67 a automatické nastavenie svetla.

ŠPECIFIKÁCIA

Dĺžka kábla	4000 mm
Image Format	04:03
Napájacie napätie DC max.	30 V DC
Napájacie napätie DC min.	12 V DC
Odolnosť proti vibráciám	50 g
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP67
Type	Analóg
Veľkosť displeje	12

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | |
|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V |
| 2 = White | = Power input: 0V |
| 3 = Blue | = Cam No. 1 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V |
| 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 6 = Grey | = Aux 1 activated at 12V...30V |
| 7 = Yellow | = Aux 2 activated at 12V...30V |
| Shielding | = To GND |



Front side molded 4p female connector:

- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| Shielding | = To housing |

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | | | |
|-----------|-----------------------------------|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V | 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 2 = White | = Power input: 0V | 6 = Grey | = Aux 1 activated at 12...30V |
| 3 = Blue | = Cam No. 1 activated at 12...30V | 7 = Yellow | = Aux 2 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V | Shielding | = To GND |
- Solder side 7p female connector:
- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| 5 = Orange | = RS232 In |
| 6 = Yellow | = RS232 Out |
| 7 = Grey | = Video 2 input |
| Shielding | = To housing |

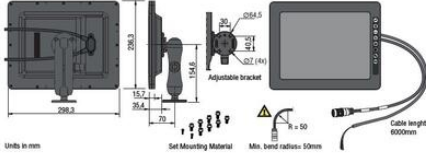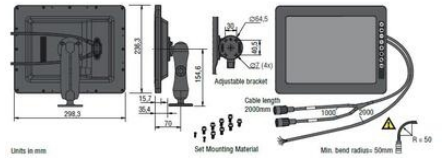

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | |
|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V |
| 2 = White | = Power input: 0V |
| 3 = Blue | = Cam No. 1 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V |
| 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 6 = Grey | = Aux 1 activated at 12V...30V |
| 7 = Yellow | = Aux 2 activated at 12V...30V |
| Shielding | = To GND |

Front side molded 4p female connector:

- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| Shielding | = To housing |

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- | | | | |
|-----------|-----------------------------------|------------------|-----------------------------------|
| 1 = Red | = Power input: 12...30V | 5 = White/Yellow | = Cam No. 3 activated at 12...30V |
| 2 = White | = Power input: 0V | 6 = Grey | = Aux 1 activated at 12...30V |
| 3 = Blue | = Cam No. 1 activated at 12...30V | 7 = Yellow | = Aux 2 activated at 12...30V |
| 4 = Brown | = Cam No. 2 activated at 12...30V | Shielding | = To GND |
- Solder side 7p female connector:
- | | |
|--------------------|--------------------------|
| 1 = Coax core | = Video input |
| 2 = Coax shielding | = Video 0V |
| 3 = Red | = Power output: 12...30V |
| 4 = Black | = Power output: 0V |
| 5 = Orange | = RS232 In |
| 6 = Yellow | = RS232 Out |
| 7 = Grey | = Video 2 input |
| Shielding | = To housing |

