



ELEKTRONICKÉ POISTKY 12/24 V DC

Série 7164xx

716400

El. fuse. 1-10A. Signal at failure

- Šírka 6,2 mm
- Spoľahlivo rieši 12/24 V DC obvody
- Môže byť dodávaný cez rozvodnú koľajnicu
- Voliteľná charakteristika








POPIS PRODUKTU


ŠPECIFIKÁCIA

| | |
|---------------------------------|--------------------------|
| Adjustable current max | 10 A |
| Adjustable current min. | 1 A |
| Adjustable steps | 1 A |
| Capacitance Max | 10000 μ F |
| Cross Section Max | 2,5 mm ² |
| Cross section min | 0,25 mm ² |
| EMC | EN61000-6-2, EN61000-6-3 |
| Hĺbka | 116 mm |
| Hmotnosť | 120 g |
| Input Current Max | 10 A |
| Power Distribution Via Rail Max | 40 A |
| Prevádzková teplota max. | 50 °C |
| Prevádzková teplota min. | -25 °C |
| Prevádzkové napätie DC max. | 30 V |
| Prevádzkové napätie DC min. | 10 V |
| Reaction time | 800 ms |
| Šírka | 8,1 mm |


| | |
|-------------------------------------|---------------|
| Trieda krytia | IP20 |
| Úbytok napätia na polovodiči | 170 mV |
| Výška | 114,5 mm |
| Výstupný prúd max. | 10 A |
| Zhoda s normami | CE, cULus, GL |

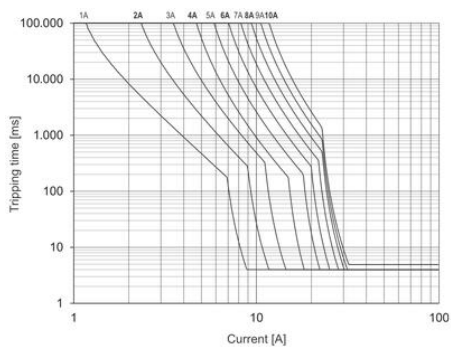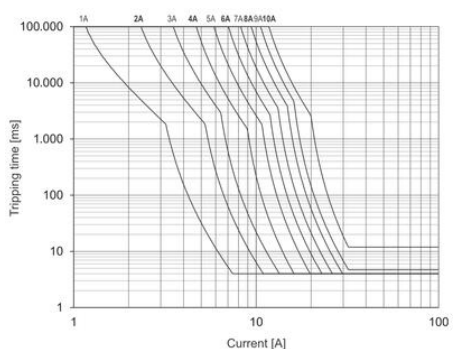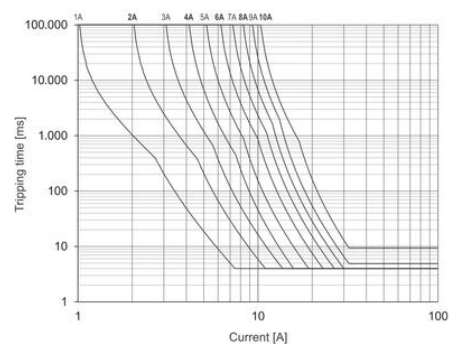
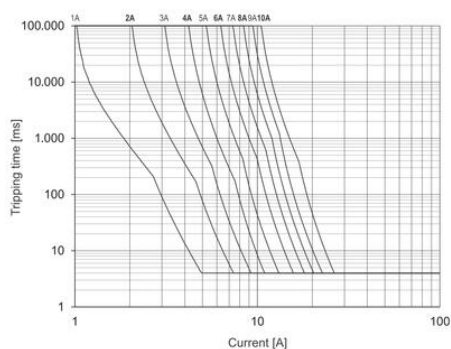
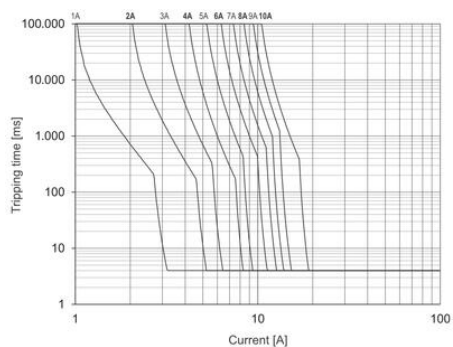


TiĽlutninger

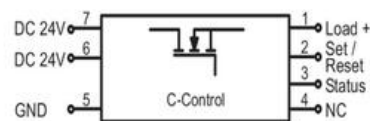

- 1: Udgang
- 2: Ekstern nulstilling/afbrydelse
- 3: Statusudgang
- 4: Ikke tilsluttet
- 5: 0 V
- 6: 24 V DC (enkelt forsyning)
- 7: 24 V DC forsyning via strmskinne



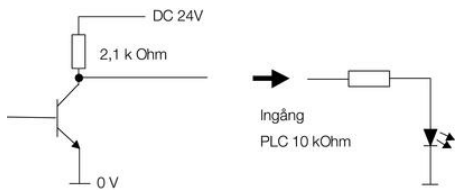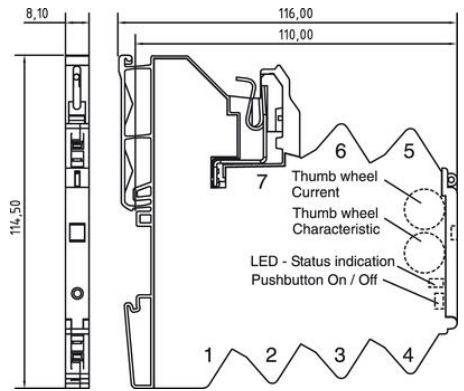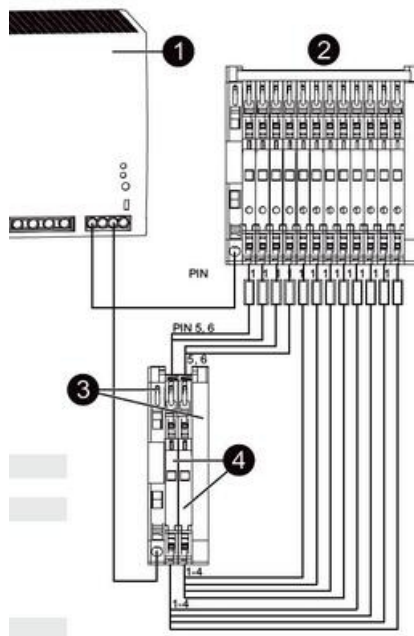

EN LED Status, Button, Rotary Switch





| | | |
|---------------------------|----------|---|
| LED green | ON | Function is OK* |
| LED green, flashing 1 Hz | Overload | Load above 90 % of I nominal |
| LED green, flashing 5 Hz | Overload | Load above 100 % of I nominal |
| LED red | OFF | Module switched off or acknowledged* |
| LED red, flashing 1 Hz | Overload | Output off due to overload/short circuit* |
| LED red, flashing 5 Hz | Error | Wiring error – feedback (internal error) |
| LED red, flashing shortly | OFF | Output off via remote set/reset |

| | | |
|------------|--------|--|
| Button *** | ON/OFF | Nominal operation: ON/OFF |
| | | Load monitoring tripped: 1st push: acknowledge |
| | | 2nd push: ON |

Rotary Switch (I) – Switch Position** Rated current, see page 4.

Rotary Switch (C) – Switch Position** Characteristic: 1: fast 2: middle
3: slow-1 4: slow-2 5: slow-3

* If the operating voltage is switched off, the last status is saved (Default).
** Accept the setting - after switching on again via the button, not by Remote Set/Reset
*** Master function - switch off via push button, can only be switched on again via push button

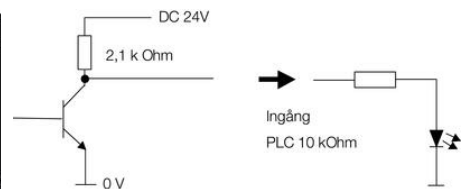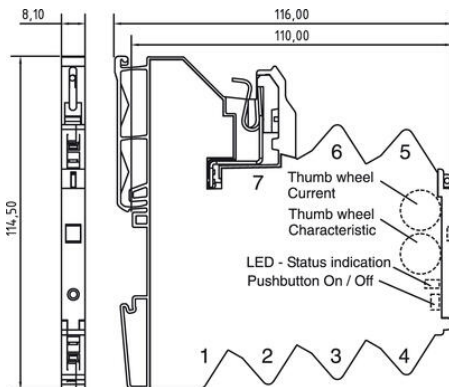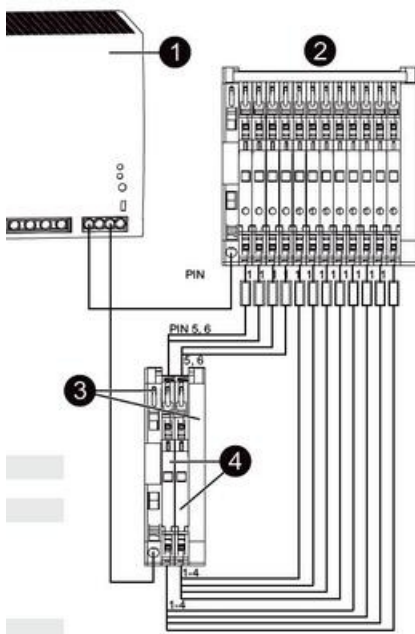

EN LED Status, Button, Rotary Switch

| | | |
|--------------------------|----------|-------------------------------|
| LED green | ON | Function is OK* |
| LED green, flashing 1 Hz | Overload | Load above 90 % of I nominal |
| LED green, flashing 5 Hz | Overload | Load above 100 % of I nominal |

| | | |
|---------------------------|----------|---|
| LED red | OFF | Module switched off or acknowledged* |
| LED red, flashing 1 Hz | Overload | Output off due to overload/short circuit* |
| LED red, flashing 5 Hz | Error | Wiring error – feedback (internal error) |
| LED red, flashing shortly | OFF | Output off via remote set/reset |

| | | |
|------------|--------|--|
| Button *** | ON/OFF | Nominal operation: ON/OFF |
| | | Load monitoring tripped: 1st push: acknowledge |
| | | 2nd push: ON |

Rotary Switch (I) – Switch Position** Rated current, see page 4.

| | | |
|---------------------------------------|-------------------------|---------------------|
| Rotary Switch (C) – Switch Position** | Characteristic: 1: fast | 2: middle |
| | 3: slow-1 | 4: slow-2 5: slow-3 |

* If the operating voltage is switched off, the last status is saved (Default).

** Accept the setting - after switching on again via the button, not by Remote Set/Reset

*** Master function - switch off via push button, can only be switched on again via push button