



TERMOMETRE

Séria R73

R73-14349884

Termometer Ø100 -80-60°C 100x10mm G1/2

- Plynové
- Teplota -200°C až 700°C
- Ø100, Ø160 mm
- Pripojenie G, M, NPT
- ATEX, GOST, EAC




POPIS PRODUKTU


ŠPECIFIKÁCIA

Insertion length	100 mm
Materiál kontaktnej časti	Nerezová oceľ 316
Materiál skla	Laminované bezpečnostné sklo
Materiál tela	Nezerová oceľ 1,4301
Plug diameter	10 mm
Pozícia pripojenia	Spodný
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-80 °C
Priemer	100 mm
Teplota okolia do	60 °C
Teplota okolia od	-40 °C
Tlaková odolnosť max	25 bar
Trieda krytia	IP65

Model R73, lower mount

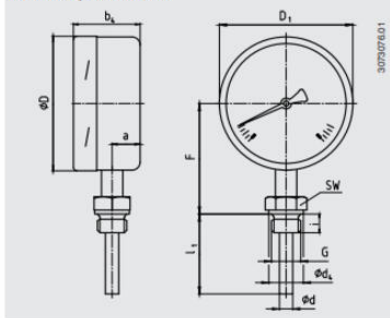


Model R73, with contact bulb
Lower mount (LM)

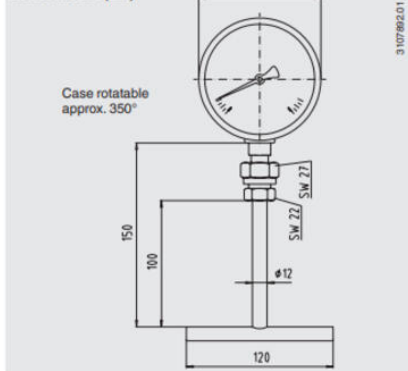

Design 4, compression fitting (sliding on stem)

Insertion length l_1 = variable
Length $L = l_1 + 40$ mm

Nominal size	Process connection	Dimensions in mm
NS	G	l ₁ SW G d _s G d
100, 160	G 1/2 B	14 27 26 8
	G 3/8 B	16 32 32 8
	M18 x 1.5	12 24 23 8
	1/2 NPT	19 32 32 8
	1/2 NPT	20 30 30 8




Legend:
G Male thread
l₁ Thread length
G d_s Diameter of the sealing collar
SW Spanner width
G d Stem diameter
L₁ Active length

Standard design (male threaded connection) ¹⁾

Standard insertion length l_1 = 63, 100, 150, 200, 250 mm


Nominal size	Process connection	Dimensions in mm
NS	G	l ₁ SW G d _s G d
100, 160	G 1/2 B	14 27 26 8
	G 3/8 B	16 32 32 8
	M18 x 1.5	12 24 23 8
	1/2 NPT	19 32 32 8
	1/2 NPT	20 30 30 8

¹⁾ Not for version with capillary (P73 and)




Legend:
G Male thread
l₁ Thread length
G d_s Diameter of the sealing collar
SW Spanner width
G d Stem diameter
L₁ Active length

Model R73, lower mount

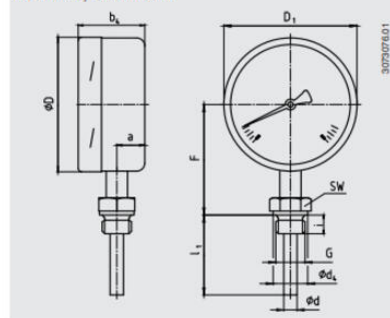

Model R73, with contact bulb
Lower mount (LM)

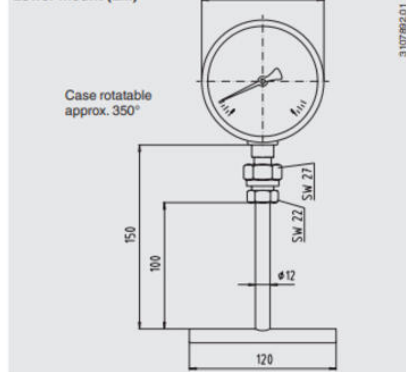


Design 4, compression fitting (sliding on stem)

Insertion length l_1 = variable
Length $L = l_1 + 40$ mm

Nominal size	Process connection	Dimensions in mm
NS	G	l ₁ SW G d _s G d
100, 160	G 1/2 B	14 27 26 8
	G 3/8 B	16 32 32 8
	M18 x 1.5	12 24 23 8
	1/2 NPT	19 32 32 8
	1/2 NPT	20 30 30 8

¹⁾ Not for version with capillary (P73 and)




Legend:
G Male thread
l₁ Thread length
G d_s Diameter of the sealing collar
SW Spanner width
G d Stem diameter
L₁ Active length

Standard design (male threaded connection) ¹⁾

Standard insertion length l_1 = 63, 100, 150, 200, 250 mm

Nominal size	Process connection	Dimensions in mm
NS	G	l ₁ SW G d _s G d
100, 160	G 1/2 B	14 27 26 8
	G 3/8 B	16 32 32 8
	M18 x 1.5	12 24 23 8
	1/2 NPT	19 32 32 8
	1/2 NPT	20 30 30 8

¹⁾ Not for version with capillary (P73 and)



Legend:
G Male thread
l₁ Thread length
G d_s Diameter of the sealing collar
SW Spanner width
G d Stem diameter
L₁ Active length