



Dopyt

SNÍMAČE TEPLOTY

Séria TR10-D

TR10D-14343181
PT100 3-pol-50-250°C 250x6mm JS bez závitů

- PT100, PT1000
- Teplota -196 až 500°C
- Pripojenie M, NPT
- Médiá voda, plyny, oleje
- ATEX, IECEx




POPIS PRODUKTU

ŠPECIFIKÁCIA

Insertion length	250 mm
Materiál kontaktnej časti	Nerezová oceľ 316Ti
Materiál tela	Hliník
Plug diameter	6 mm
Presnosť klasifikácie	Trieda B
Prevádzková teplota max.	250 °C
Prevádzková teplota min.	-50 °C
Teplota okolia do	80 °C
Teplota okolia od	-40 °C
Trieda krytia	IP65

Electrical connection

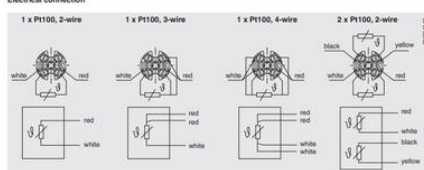


For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.




Model	Material	Cable entry thread size	Ingress protection (class I)	Cap	Surface	Connection to neck tube
JS	Aluminum	M18 x 1.5"	IP65	Cover with 2 screws	Blue, lacquered *	M24 x 1.5, 1/2 NPT

Model	Explosion protection	Ex i (gas) Zone 0, 1, 2	Ex i (dust) Zone 00, 2, 1
JS	Without	x	x


Components model TR10-D

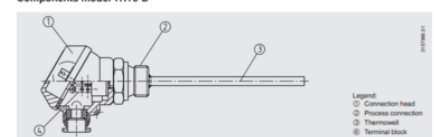

Dimensions in mm

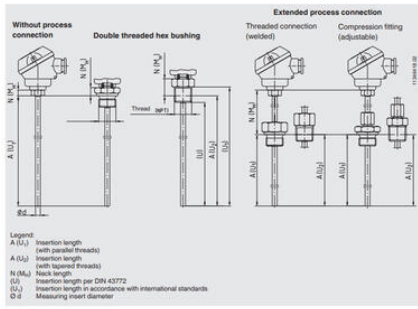

Electrical connection

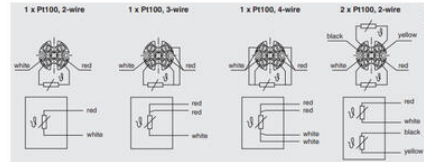


For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.



Model	Material	Cable entry thread size	Ingress protection (IP)	Cap	Surface	Connection to neck tube
J5	Aluminum	M16 x 1.5-11	IP65	Cover with 2 screws	Blk. lacquered	M24 x 1.5, 1/2 NPT

Model	Explosion protection		
	Without	Ex I (gas) Zone 0, 1, 2	Ex II (dust) Zone 20, 21
J5	x	x	x

Components model TR10-D

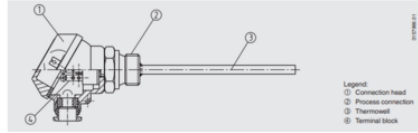

Dimensions in mm

