



Dopyt

SNÍMAČE TEPLOTY

Série TR33

TR33-14226913
M12x1 -30-150°C PT100 2-tráď G1/2 150x6mm

- Výstup 4-20mA
- Teplota -30 až 250°C
- Pripojenie G, NPT
- Médiá voda, plyny, oleje




POPIS PRODUKTU

ŠPECIFIKÁCIA


Connection	G1/2
Insertion length	150 mm
Materiál	Nerezová oceľ
Merací signál	PT100
Napájacie napätie DC max.	30 V DC
Napájacie napätie DC min.	10 V DC
Plug diameter	6 mm
Presnosť klasifikácie	Trieda A
Teplota média do	150 °C
Teplota média od	-30 °C
Teplota okolia do	85 °C
Teplota okolia od	-50 °C
Tlakový rozsah max.	270 bar
Trieda krytia	IP67

Dimensions in mm

Process connection with tapered threads

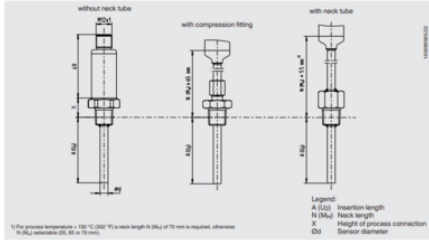


Process connection with parallel threads (or without process connection)

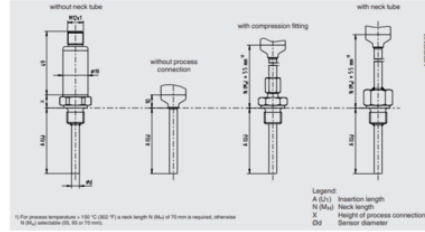

Configuration software WIKAsoft-TT




Connecting PU-548 programming unit

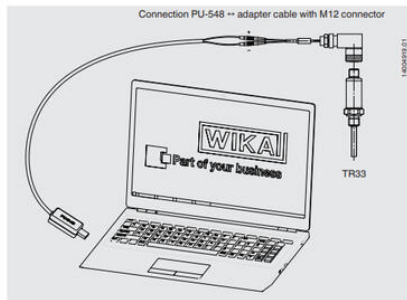


(predecessor, programming unit model PU-448, also compatible)

Electrical connection

Output signal 4 ... 20 mA




Output signal Pt100 or Pt1000 sensor




Dimensions in mm

Process connection with tapered threads

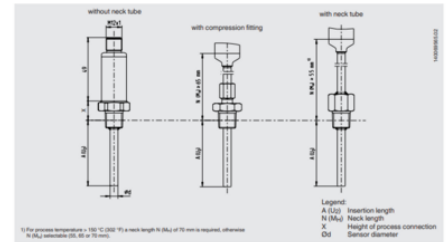


Process connection with parallel threads (or without process connection)

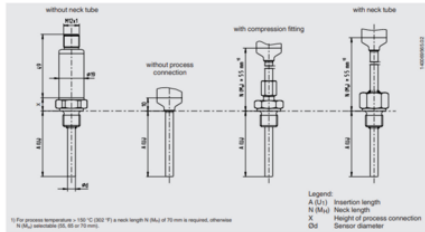

Configuration software WIKAsoft-TT




Connecting PU-548 programming unit

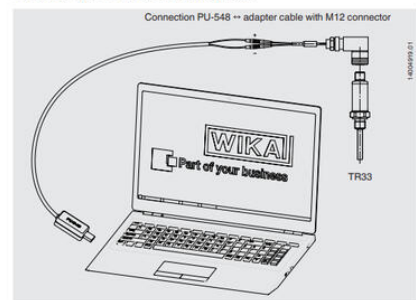

(predecessor, programming unit model PU-448, also compatible)

Electrical connection

Output signal 4 ... 20 mA



Output signal Pt100 or Pt1000 sensor

