Dopyt

TERMOČLÁNKY

Séria TR95

TR95
Termočlánok


- Teplota -196°C až 600°C
- PT100
- Telo nerez, špeciálne materiály
- ATEX, IECEx, GOST





POPIS PRODUKTU

ŠPECIFIKÁCIA


Materiál	Nerezová oceľ 316L, Nerezová oceľ 316Ti
Materiál kontaktnej časti	Zliatina
Zhoda s normami	NAMUR, Ex-ia

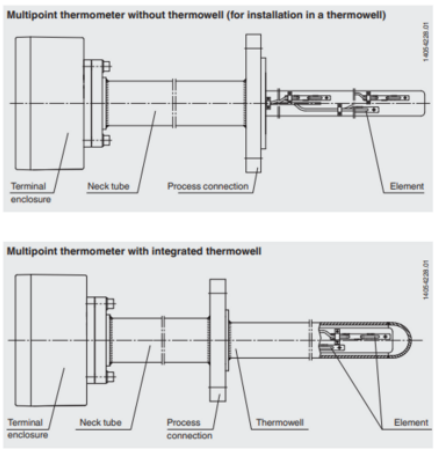


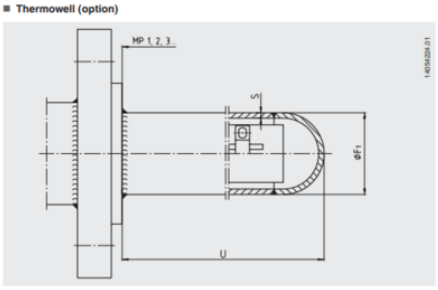


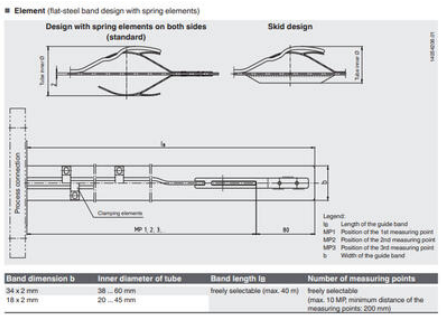

■ Neck tube

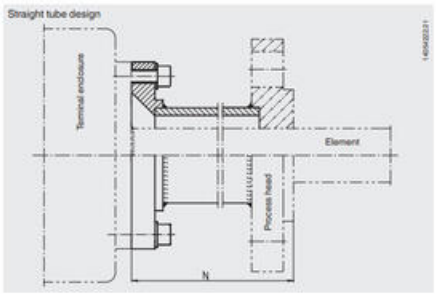


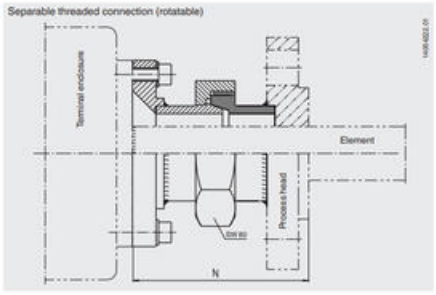


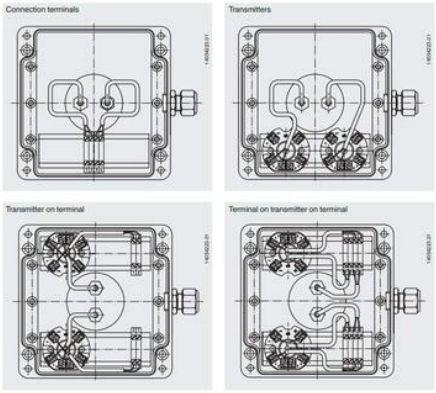


The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 6 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP

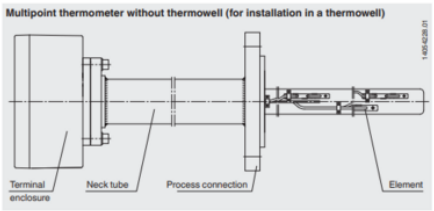


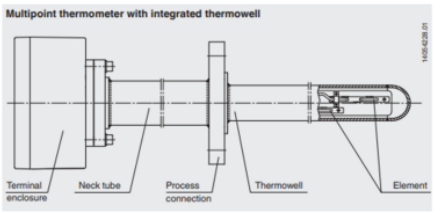

■ Thermowell (option)

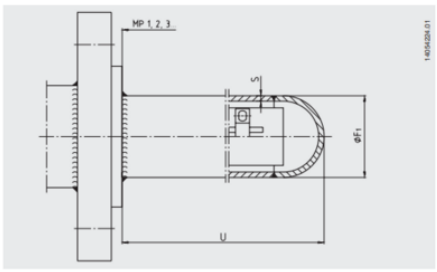



■ Element (flat-steel band design with spring elements)

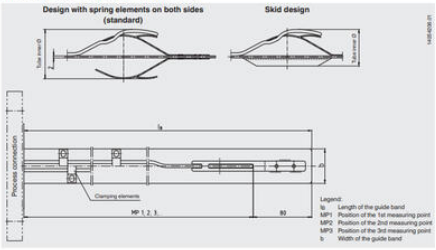


Band dimension b	Inner diameter of tube	Band length lg	Number of measuring points
34 x 2 mm	38 ... 60 mm	freely selectable (max. 40 m)	freely selectable (max. 10 MP minimum distance of the measuring points: 200 mm)
18 x 2 mm	20 ... 45 mm		

■ Neck tube

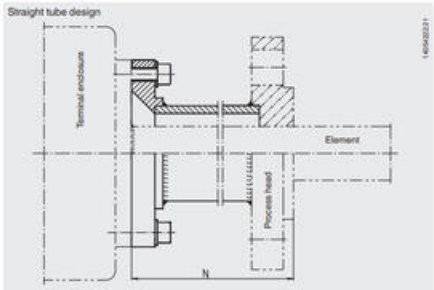

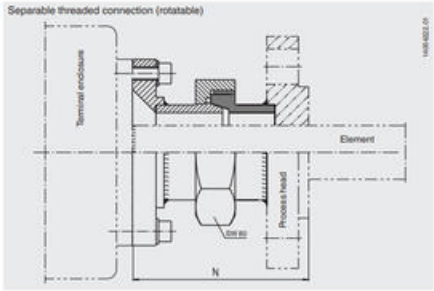

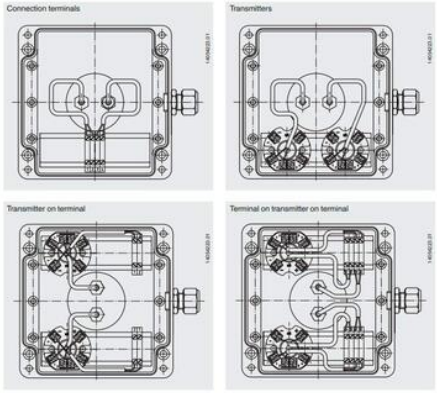

The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 6 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP