



TERMOČLÁNKY

Séria TR95

TR95
Termočlánok



- Teplota -196°C až 600°C
- PT100
- Telo nerez, špeciálne materiály
- ATEX, IECEX, GOST




POPIS PRODUKTU


ŠPECIFIKÁCIA

Materiál	Nerezová oceľ 316L, Nerezová oceľ 316Ti
Materiál kontaktnej časti	Zliatina, Carbon steel
Zhoda s normami	NAMUR, Ex-ia


Multipoint thermometer without thermowell (for installation in a thermowell)

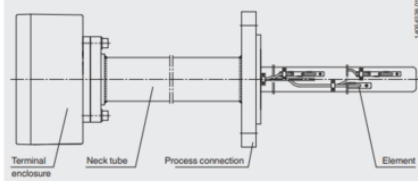


Multipoint thermometer with integrated thermowell

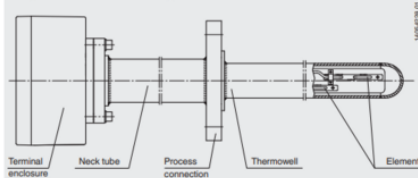







■ Thermowell (option)

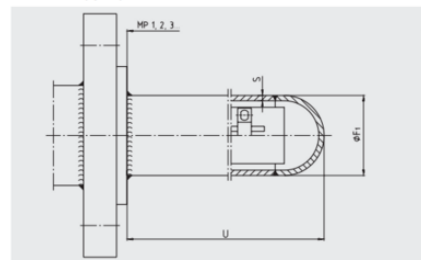

■ Element (flat-steel band design with spring elements)

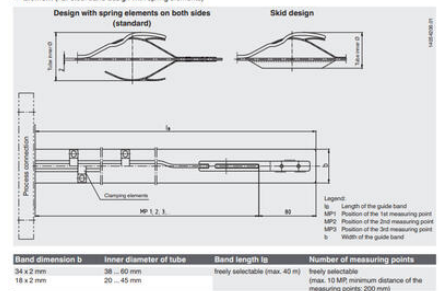


■ Neck tube

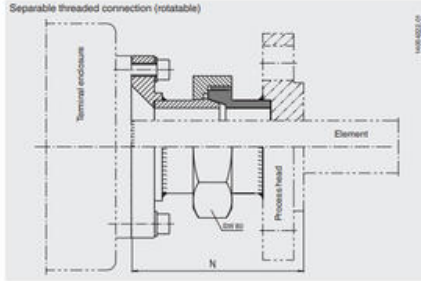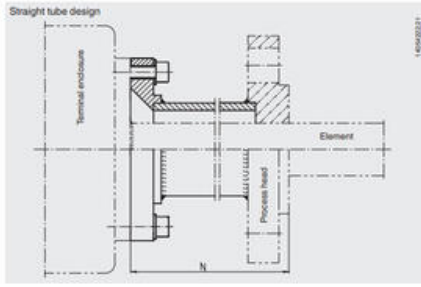


The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 6 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP


■ Multipoint thermometer without thermowell (for installation in a thermowell)

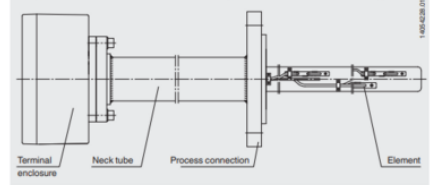


■ Multipoint thermometer with integrated thermowell

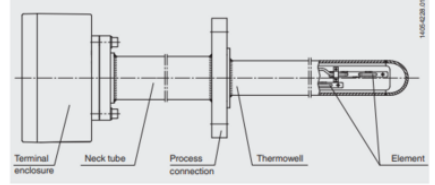


■ Thermowell (option)

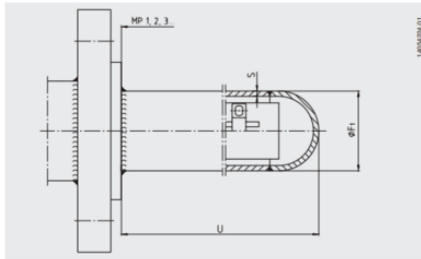



■ Element (full-steel band design with spring elements)

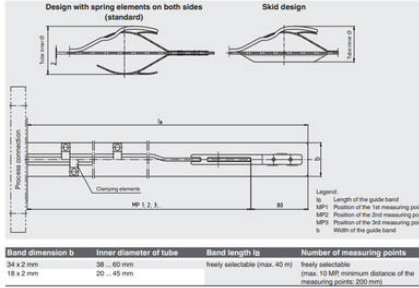

■ Neck tube

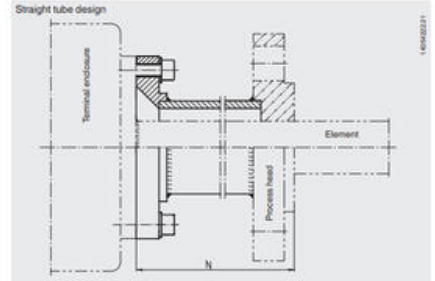

■ Separable threaded connection (rotatable)

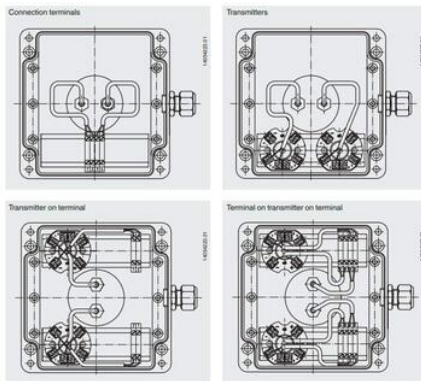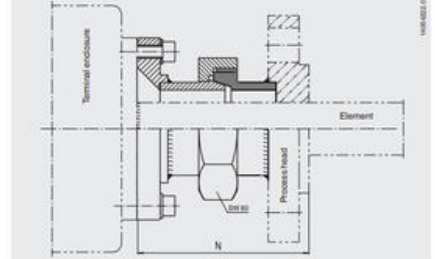

The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	ca. 160 x 160	ca. 160 x 260	ca. 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 6 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP