



TERMOČLÁNKY

Séria TC59-V



TC59-V

Termočlánok V-PAD

- Teplota 0°C až 1260°C
- K, J, E, N
- Telo nerez, špeciálne materiály
- ATEX, IECEx, GOST




POPIS PRODUKTU

ŠPECIFIKÁCIA


Materiál kontaktnej časti	Hastelloy, Nerezová oceľ
Prevádzková teplota max.	1260 °C
Prevádzková teplota min.	0 °C

Fixed connection (compression fitting) to the furnace

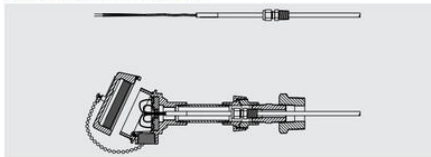


- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting, it can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.

Sliding connection (piston/spring) to the furnace

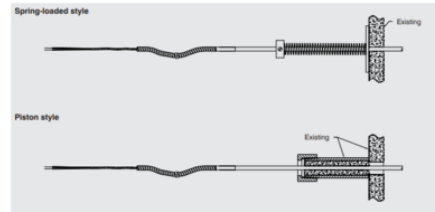

Fixed connection (compression fitting) to the furnace

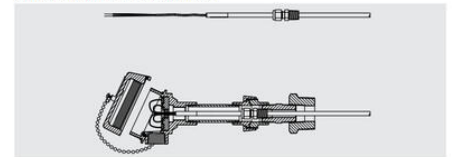

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting, it can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.

Sliding connection (piston/spring) to the furnace

