



TERMOČLÁNKY

Séria TC59-X



TC59-X
Termočlánok XTRACTOR-PAD

- Teplota 0°C až 1260°C
- K, J, E, N
- Telo nerez, špeciálne materiály
- ATEX, IECEx, GOST




POPIS PRODUKTU

ŠPECIFIKÁCIA

Materiál kontaktnej časti	Hastelloy, Nerezová oceľ
Prevádzková teplota max.	1260 °C
Prevádzková teplota min.	0 °C




Fixed connection (compression fitting) to the furnace

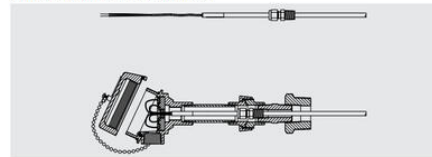

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting, it can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely.


Sliding connection (piston/spring) to the furnace

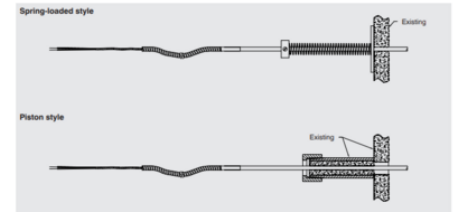


Expansion loops

Expansion loops should be designed to account for maximum tube movement from startup position to operating temperature. Loops should be designed in accordance with allowable space available.

Examples of expansion loops:

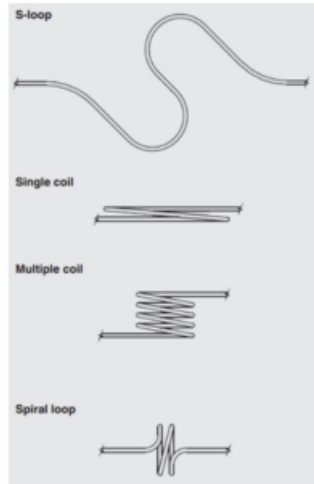


Fixed connection (compression fitting) to the furnace

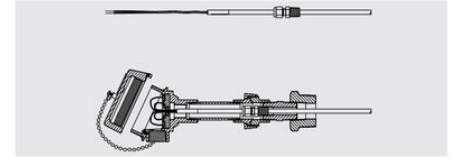

- Cable length 150 mm, other lengths on request
- Compensating cable type depending on the sensor type, PTFE-insulated
- The sealing from the process is performed by the compression fitting. It can be supplied in most common thread sizes.
- A connection head can be mounted directly to the neck or remotely

Sliding connection (piston/spring) to the furnace

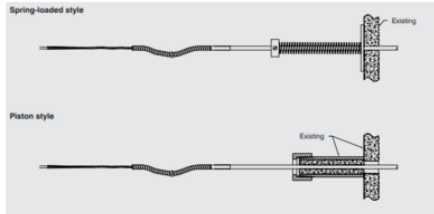

Expansion loops

Expansion loops should be designed to account for maximum tube movement from startup position to operating temperature. Loops should be designed in accordance with allowable space available.

Examples of expansion loops:

