



KÁBLE S KONEKTORMI

ORL0301960

Kábel 1m 4 Pin

- 4 pinové a 7 pinové konektory M16
- Vyvinuté spoločnosťou Orlaco pre najlepšiu ochranu EMC
- -40 až + 85 ° C




POPIS PRODUKTU

Spoločnosť Orlaco vyvíja vlastnú kabeláž, aby získala najlepší možný obraz a ochranu EMC. Lisované kontakty zaisťujú dobrú ochranu proti vlhkosti. Tieto káble sú určené pre statickú montáž.


Ak chcete použiť kabeláž pre mobilnú aplikáciu, mali by ste sa pozrieť na záložku Flexibilné káble.

ŠPECIFIKÁCIA

Cable Diameter	6 mm
Dĺžka kábla	1000 mm
Materiál	PVC
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP67
Type	Analóg



Front side female connector



Front side male connector

Electrical connection

1 = Coax core = Video signal
2 = Coax shielding = Video GND
3 = Red = 12V/DC
4 = Black (0V) = 0V
Shielding = GND



Front side molded 7P Female connector





Front side molded 7P Male connector


Electrical connection molded connectors

1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)

Dimensions

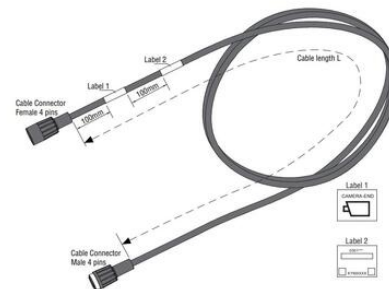

Front side female connector



Front side male connector

Electrical connection

1 = Coax core = Video signal
2 = Coax shielding = Video GND
3 = Red = 12V/DC
4 = Black (0V) = 0V
Shielding = GND



Front side molded 7P Female connector



Front side molded 7P Male connector

Electrical connection molded connectors

1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)

Dimensions

