



Dopyt

ORLACO®

10" MONITOR

ORL0224000

Monitor 10" HLED 1

- 12-24 V DC
- Prevádzková teplota -40 až +85 ° C
- Rozlíšenie WXGA 1280xRGBx800 pixelov



POPIS PRODUKTU

Tento monitor s vysokým rozlíšením je odolný proti otrasom a vibráciám, automaticky upravuje jas podľa okolitého svetla a je schopný zrkadliť obraz. Monitor je k dispozícii v dvoch variantoch, jeden model (MR1) je so stojanom a druhý model stojan neobsahuje, ale možno ho dokúpiť samostatne.

ŠPECIFIKÁCIA

Napájacie napätie DC max.	24 V DC
Napájacie napätie DC min.	12 V DC
Odolnosť proti vibráciám	50 g
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP54
Type	Digitál
Veľkosť displeje	10,1


Power cable open wired (Secure the power input with a 5A fuse)

- 1 = Red = Video power in: 12V/24V
- 2 = Blue = Aux 1
- 3 = Brown = Aux 2
- 4 = White = Power GV in
- 5 = Grey = CAN-H
- 6 = Yellow = CAN-L
- 7 = White/yellow = N.C.



Video cable front side molded 4p + Coax female connector:

- 1 = Black = GND
- 2 = Red = Power
- 3 = Yellow = Aux 1
- 4 = Grey = Aux 2
- 5 = Coax core = Video
- 6 = Coax shield = Video GND
- Shielding = To housing

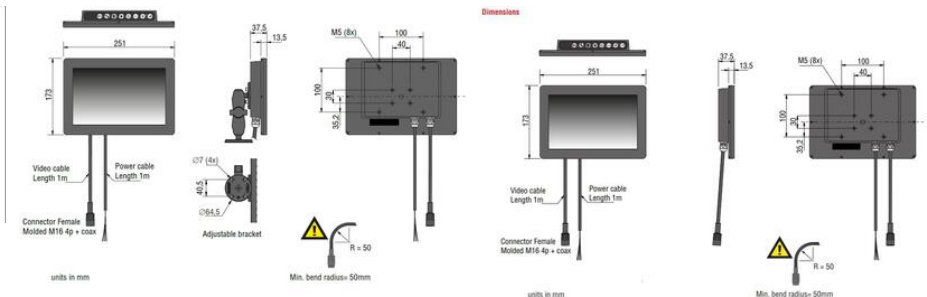

Power cable open wired (Secure the power input with a 5A fuse)

- 1 = Red = Video power in: 12V/24V
- 2 = Blue = Aux 1
- 3 = Brown = Aux 2
- 4 = White = Power OV in
- 5 = Grey = CAN-H
- 6 = Yellow = CAN-L
- 7 = White/yellow = N.C.




Video cable front side molded 4p + Coax female connector:


- 1 = Black = OV
- 2 = Red = Power
- 3 = Yellow = Aux 1
- 4 = Grey = Aux 2
- 5 = Coax core = Video
- 6 = Coax shield = Video GND
- Shielding = To housing



Dimensions



units in mm

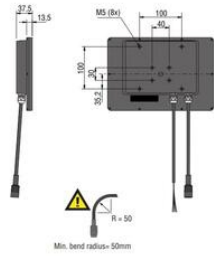

Min. bend radius=50mm