



Dopyt

ORLACO®

7" MONITOR HLED

ORL0226010
Monitor 7" HLED

- 12-24 V DC
- Prevádzková teplota -40 až +85 ° C
- Rozlíšenie WXGA 1280xRGBx800 pixelov



POPIS PRODUKTU

Integrovaný monitor s vysokým rozlíšením je odolný proti otrasom a vibráciám, automaticky upravuje jas obrazu podľa okolitého svetla a má korekciu zrkadlového obrazu.

Pomocou prepínača Orlaco GMSL možno pripojiť maximálne štyri kamery.

ŠPECIFIKÁCIA


Dĺžka kábla	1000 mm
Image Format	16:09
Napájacie napätie DC max.	30 V DC
Napájacie napätie DC min.	12 V DC
Prevádzková teplota max.	75 °C
Prevádzková teplota min.	-30 °C
Trieda krytia	IP67, IP69K
Veľkosť displeje	7

Power cable open wired (Secure the power input with a 5A fuse)


1 = Red = Video power in: 12V/24V
2 = Blue = Aux 1
3 = Brown = Aux 2
4 = White = Power OV in
5 = Grey = CAN-H
6 = Yellow = CAN-L
7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:

1 = Black = OV
2 = Red = Power
3 = Yellow = Aux 1
4 = Grey = Aux 2
5 = Coax core = Video
6 = Coax shield = Video GND
Shielding = To housing



Dimensions

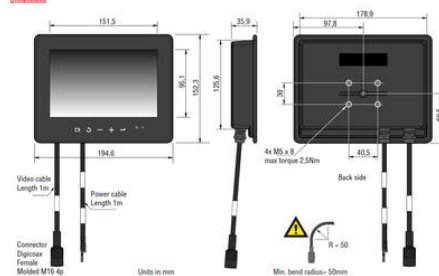


Power cable open wired (Secure the power input with a 5A fuse)

1 = Red = Video power in: 12V/24V
2 = Blue = Aux 1
3 = Brown = Aux 2
4 = White = Power OV in
5 = Grey = CAN-H
6 = Yellow = CAN-L
7 = White/yellow = N.C.

Video cable front side molded 4p + Coax female connector:

1 = Black = OV
2 = Red = Power
3 = Yellow = Aux 1
4 = Grey = Aux 2
5 = Coax core = Video
6 = Coax shield = Video GND
Shielding = To housing



Dimensions

