



Dopyt

ORLACO®

## FLEXIBILNÉ KÁBLE

ORL0304371  
Flexibilný kábel

- Mäkký povrch s malým polomerom ohybu
- 4 a 7 pinové odlievané konektory M 16
- -40 až + 85 ° C





### POPIS PRODUKTU

Vhodné na použitie v pohyblivých aplikáciách, napríklad pre kameru namontovanú na ramene, výložníka bagra alebo na nákladnom vozni so sklápačom.


## ŠPECIFIKÁCIA

Cable Diameter	9 mm
Dĺžka kábla	500 mm
Materiál	PUR
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP67
Type	Analóg



#### Electrical connection


1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.




#### Electrical connection


Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



#### Dimensions

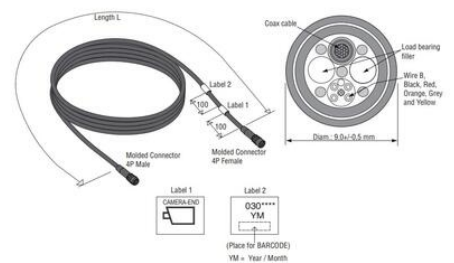




Units in mm

Label 2  
030\*\*\*0  
YM

Label 1  
Camera End



Front side  
4p Male connector



Front side  
4p Female connector

**Electrical connection**

- |                    |             |
|--------------------|-------------|
| 1 = coax core      | Video       |
| 2 = coax shielding | Video GND   |
| 3 = red            | 12...30V/DC |
| 4 = black          | 0V          |
| Orange             | N.C.        |
| Yellow             | N.C.        |
| Grey               | N.C.        |

**Electrical connection**

**Soldering of connectors (female 1311250 + male 1322450)**


- |                 |
|-----------------|
| 1 = Video       |
| 2 = Video GND   |
| 3 = Power input |
| 4 = 0V          |
| 5 = Aux 1       |
| 6 = Aux 2       |
| 7 = Aux 3       |





Solder side  
7P Male connector



Solder side  
7P Female connector



**Dimension**

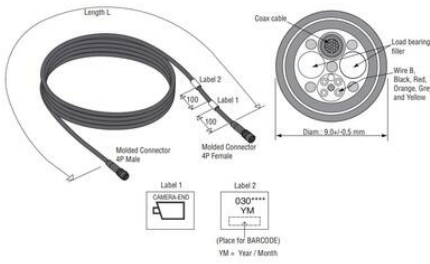

Units in mm

Label 2  
030\*\*\*0  
YM

Label 1  
Camera End