



Dopyt

ORLACO®

FLEXIBILNÉ KÁBLE

ORL0304371
Flexibilný kábel

- Mäkký povrch s malým polomerom ohybu
- 4 a 7 pinové odlievané konektory M 16
- -40 až + 85 ° C





POPIS PRODUKTU

Vhodné na použitie v pohyblivých aplikáciách, napríklad pre kameru namontovanú na ramene, výložníka bagra alebo na nákladnom vozni so sklápačom.


ŠPECIFIKÁCIA

Cable Diameter	9 mm
Dĺžka kábla	500 mm
Materiál	PUR
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP67
Type	Analóg



Electrical connection


1 = coax core Video
2 = coax shielding Video GND
3 = red 12...30V/DC
4 = black 0V
Orange N.C.
Yellow N.C.
Grey N.C.




Electrical connection


Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

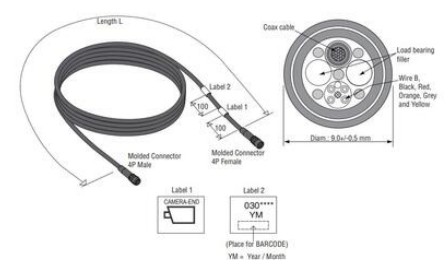




Units in mm




Front side
4p Male connector



Front side
4p Female connector

Electrical connection

- 1 = coax core Video
- 2 = coax shielding Video GND
- 3 = red 12...30V/DC
- 4 = black 0V
- Orange N.C.
- Yellow N.C.
- Grey N.C.




Solder side
7P Male connector




Solder side
7P Female connector

Electrical connection
Soldering of connectors (female 1311250 + male 1322450)

- 1 = Video
- 2 = Video GND
- 3 = Power input
- 4 = 0V
- 5 = Aux 1
- 6 = Aux 2
- 7 = Aux 3



Dimensions

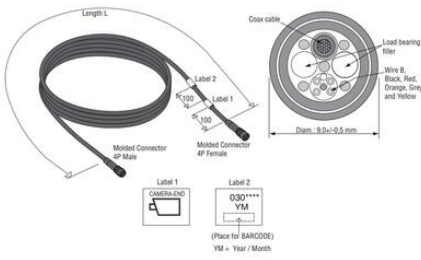

Units in mm

