



VENTILY 3/2 PROPORCIONÁLNE

Séria 616 Sentronic HD

G616A42222A0010

Sentronic HD G1/4 4-20mA / 4-20mA 0-10Bar


- G1/4
- Teplota 0 až 50 °C
- Tlak -1 až 10 bar
- Médium vzduch, plyny
- Telo hliník



POPIS PRODUKTU

ŠPECIFIKÁCIA

Diferenčný tlak olej max.	10 bar
Diferenčný tlak para max.	0 bar
Diferenčný tlak vzduch max.	10 bar
Pripojenie pre pilotný vzduch	G1/4
Telo	Hliník
Teplota média do	0 °C
Teplota média od	50 °C
Trieda krytia	IP65

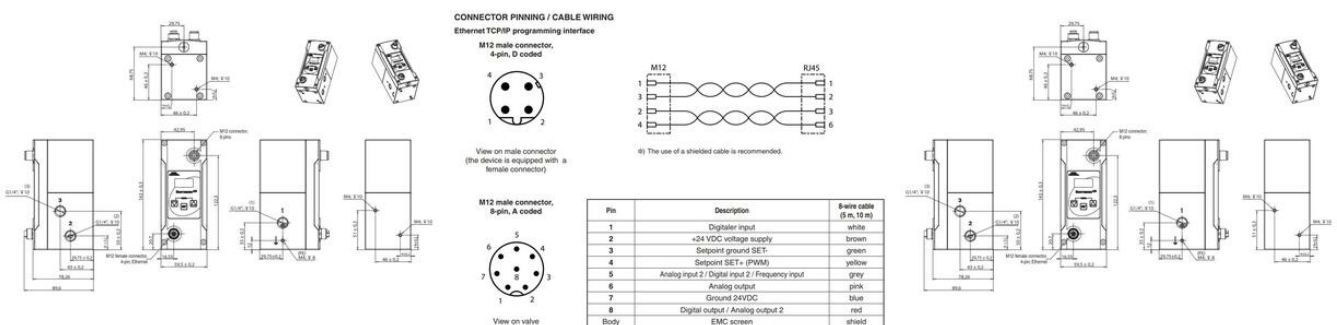

CONNECTOR PINNING / CABLE WIRING

Ethernet TCP/IP programming interface

M12 male connector,
4-pin, D coded



View on male connector
(the device is equipped with a
female connector)



8) The use of a shielded cable is recommended.

M12 male connector,
8-pin, A coded



View on valve

Pin	Description	8-wire cable (5 m, 10 m)
1	Digitaler input	white
2	+24 VDC voltage supply	brown
3	Setpoint ground SET-	green
4	Setpoint SET+ (PWM)	yellow
5	Analog input 2 / Digital input 2 / Frequency input	grey
6	Analog output	pink
7	Ground 24VDC	blue
8	Digital output / Analog output 2	red
Body	EMC screen	shield