



Dopyt

ISD860 - 12A 72V INTELIGENTNÝ STUPEŇ OVLÁDAČA


4607212040

ISD860 RS232 P029.001.E101





TECHNOSOFT
MOTION TECHNOLOGY


- Až 860W, 12A nepretržitý 31A špičkový, 12-72VDC
- DC, Brushless alebo lineárny motor s rovnakým ovládaním
- Komunikácia cez RS232, CANopen
- Vstup diferenciálneho snímača

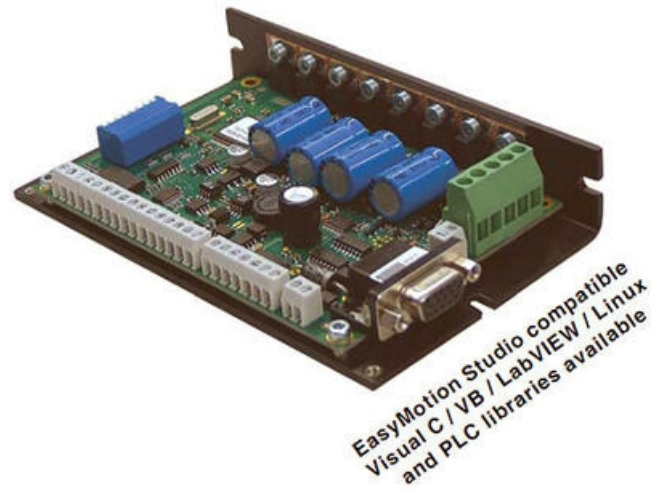

EasyMotion Studio compatible
Visual C / VB / LabVIEW / Linux
and PLC libraries available

POPIS PRODUKTU

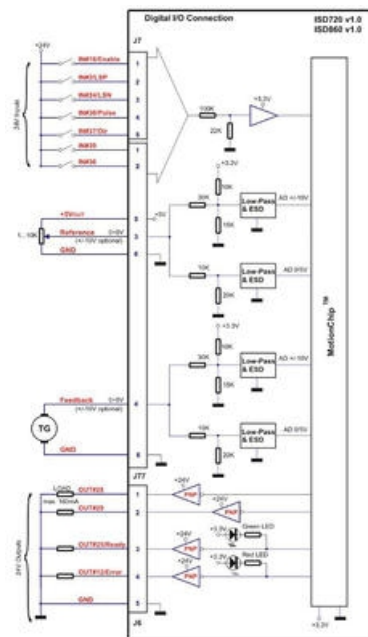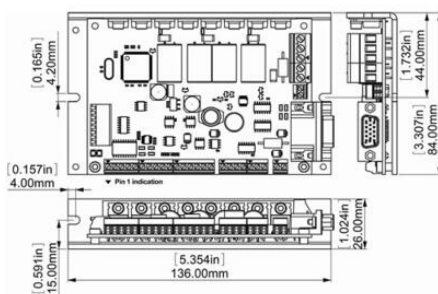



J6:	J77:	J4:	J8:	J4-HDB15:
1-GPout1;	1-Home;	1+VCAN;	1-GND;	1-ENCA
2-GPout2;	2-GPIN;	2-CAN.HI;	2+Vmot;	2-ENCB;
3+Ready;	3-Reference;	3-CAN.LO;	3-GND;	3+VNCB;
4-Feedback;	4-Feedback;	4-GND;	J10:	4-ENCA;
5-GND;	5+SV;	J1:	5+Vmot;	5-HALL1+;
J7:	6-GND;	1-Phase A;	2-Break;	6-MotorTemp;
1-ENAL;		2-Phase B;		7-ENCA2+;
2-LSP;		3-Phase C;		8-ENCA2-;
3-LSN;	J5:			9-HALL2+;
4-Pulse;	1-232RX;	1+Vsig;		10-HALL2-;
5-Direction;	2-232TX;	2-GND;		11-ENCA-;
				12-ENCB-;
				13-GND;
				14-HALL3-;
				15-HALL1-;

Note: All the connectors on board are screw connectors except J5 which is a high density HDB15 connector.

Note: All the connectors on board are screw connectors except the J2 which is a high density HDB15 connector.