



EM-241C

Ovládanie jednosmerného motora

EM-241C

EM-241C 12-24V DC 15A

- 12-48 V DC
- Limit prúdu (0,1-20 A)
- Regulácia rýchlosti
- Ramping
- Digitálne nastavenie parametrov





POPIS PRODUKTU

ŠPECIFIKÁCIA

Brake output	Nie
Change direction of rotation (CW/CCW)	Áno
Current limit	0,1-25
Current limit adjustable	Áno
Current setting range	0.1-15 A
Currenttrip autoreveice	Áno
Forward/Reverse	Áno
Functions	Currenttrip autoreversing, Speed settings, Impulse/continuous mode, Joystick analog input, Softstart/stop, Potentiometer adjustable speed, RS485/Modbus, Stop at limit position, Speedregulator, Change direction of rotation (CW/CCW)
Hmotnosť	75 g
Impulse/continuous mode	Áno
Joystick analog input	Nie
Montáž	DIN lišta
Napájacie napätie	12 V DC, 24 V DC
Parallel driver four motors	Nie
Parallel driver two motors	Nie
Peak current	(5s) *30
Position with potentiometer	Nie

Positioning	Nie
Potentiometer adjustable speed	Áno
Prevádzková teplota	-40°C...+60°C
PWM frequency	2kHz/16kHz
RS485/Modbus	Nie
Softstart/stop	Áno
Speed settings	Áno
Speedregulator	Áno
Stop at limit position	Áno
Supplier	Electromen

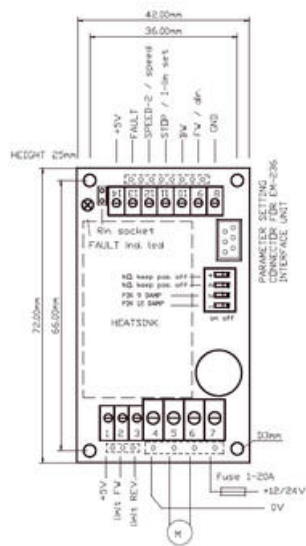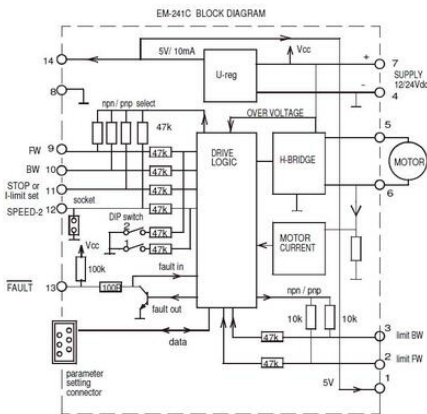

Molex connector options with dashed line
 3-pin molex: 22-27-2031
 4-pin molex: 10-08-5041
 7-pin molex: 22-27-2071