



Dopyt

PNEUMATICKÉ VALCE

Séria G449






G449A61K0015A00

Pneumatický válec G449 Ø63 15 mm, jednocinný

- ISO 21287
- Ø20mm až 100mm
- Zdvih 5mm až 400mm
- Jedno alebo dvojčinný










POPIS PRODUKTU

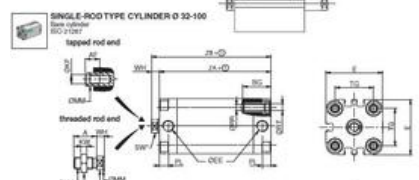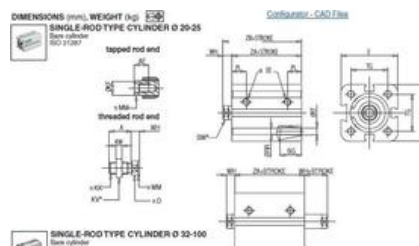

Ø	weight
20	1.125 0.0024
25	0.15 0.003
32	0.248 0.0054
40	0.242 0.0053
50	0.401 0.0088
63	0.553 0.0122
80	0.841 0.0179
100	1.215 0.0269

Ø	A	AF	BG	CG	E	EE	CKF	CKX	KV	KW	DM6	PL	DRG	OST	SW	TG	WH	ZA	ZB
20	16	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
25	16	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
32	16	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
40	16	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
50	16	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
63	22	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
80	22	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42
100	28	10	10	10	5.8	40	M5	M5	M5x1.25	12	4	10	10	4.2	M5	8	25	0	42



Ø	weight	
	(2)	(3)
20	0.120	0.0008
25	0.19	0.003
30	0.258	0.009
40	0.340	0.0203
50	0.421	0.0468
60	0.550	0.0660
80	0.681	0.0978
100	1.018	0.0289

(2) Cylinder weights at 2 mm stroke.

O	A	AF	BQ	GU	E	EE	ONF	ONK	KV	KW	OMM	PL	DGR	DRT	SW	TG	WA	ZA	ZS
30	16	10	15	9.8	36	40	Min	Min	13	4	10	16	4.3	Min	6	20	4	27	43
30	16	10	15	9.8	36	40	Min	Min	13	4	10	16	4.3	Min	6	20	4	27	43
30	16	10	15	23.5	31.8	40	C 1/8	Min	Min	13	4	10	7.5	5.1	Min	10.5	7.4	44	51
40	16	10	15	23.3	31.8	54	C 1/8	Min	Min	13	4	10	7.5	5.1	Min	10	7	43	52
30	22	18	24	19.8	36	40	Min	Min	16	8	16	7.5	6.7	Min	13	48.5	8	43	53
30	22	18	24	19.8	36	40	Min	Min	16	8	16	7.5	6.7	Min	13	54.5	8	49	57
30	22	18	24	19.8	36	40	Min	Min	16	8	16	7.5	6.7	Min	13	54.5	8	49	57
100	28	20	26.5	24.8	115	C 1/8	Min	Min	5.0	4	20	40	8.4	Min	20	49	10	67	87