




VENTILY 3/2, 5/2, 5/3

Série 551

SCG551A002MSS2

Ventil 3/2 5/2 NAMUR bistabilný 24VAC

- G1/4
- Teplota -25 až 60 °C
- Tlak 2 až 10 bar
- Médium vzduch, plyny
- Tělo hliník

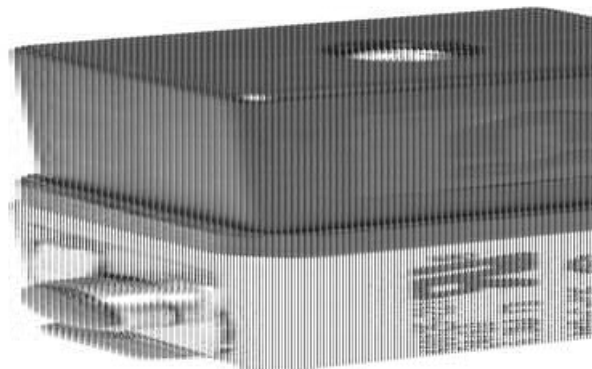

POPIS PRODUKTU

ŠPECIFIKÁCIA

AC	24 V
Diferenčný tlak max.	10 bar
Diferenčný tlak min.	2 bar
Funkcia 1	3/2-5/2
Funkcia 2	Elektrický, NAMUR
Koeficient prietoku	12,5
Materiál tela	Eloxovaný hliník
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Prietok max.	860 l/min
Procesné pripojenie	G1/4
Trieda krytia	IP65
Type of valve	Electrically controlled

Compact size	Captive mounting screws	All exhaust can be channelled	Internal ports isolated from the environment	External pilot pressure connection	Long service life
--------------	-------------------------	-------------------------------	--	------------------------------------	-------------------




Auxiliary pilot exhaust

Stainless steel manual override

High flow rate up to 3800 l/min

Integrated pilot with epoxy coil

Internal volume channelled to exhaust

Mini exhaust reducer

"NAHER STYLE" interface plates 3/2 or 5/2 function



Compact size	Captive mounting screws	All exhaust can be channelled	Internal ports isolated from the environment	External pilot pressure connection	Long service life
--------------	-------------------------	-------------------------------	--	------------------------------------	-------------------




Auxiliary pilot exhaust

Stainless steel manual override

High flow rate up to 3800 l/min

Integrated pilot with epoxy coil

Internal volume channelled to exhaust

Mini exhaust reducer

"NAHER STYLE" interface plates 3/2 or 5/2 function

