




2-4 PÓLOVÉ ROZVODOVÉ BLOKY

RPQ0995

4pólová svorkovnica - RPQ80-12

- 40 A až 160 A.
- Samozhášavá izolačná konštrukcia UL 94-V0
- Izolácia medzi fázami
- Mosadzné vodiče

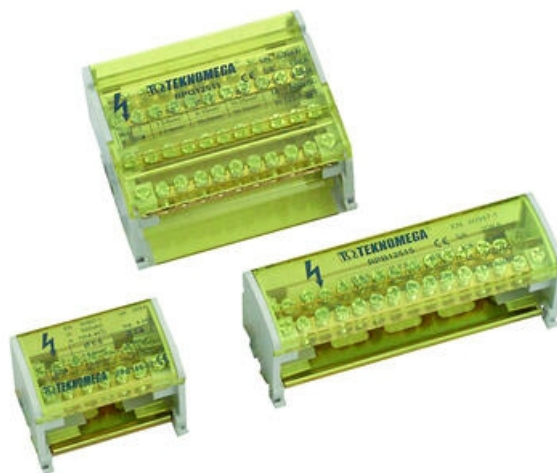

POPIS PRODUKTU

ŠPECIFIKÁCIA

Connections	13
Fix. Hole space	80 mm
Height (H)	84 mm
Input A: diameter	7,5 mm
Input A: torque, max.	3
Input A: torque, min.	2
Input A: wire cross-section stranded, max.	25 mm ²
Input A: wire cross-section stranded, min.	10 mm ²
Input A: wire cross-section with wire-end ferrules, max.	16 mm ²
Input A: wire cross-section with wire-end ferrules, min.	6 mm ²
Length (L)	100 mm
Nominal insulation voltage	500 V
Nominálny prúd	80 A
Number of inputs A	1
Number of outputs A	1
Number of outputs B	8
Number of outputs C	2

Number of outputs D	1
Output A: diameter	7,5 mm
Output A: torque, max.	3
Output A: torque, min.	2
Output A: wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Output A: wire cross-section stranded with wire-end ferrules, min.	6 mm ²
Output A: wire cross-section stranded, max.	25 mm ²
Output A: wire cross-section stranded, min.	10 mm ²
Output B: diameter	4,5 mm
Output B: torque, max.	3
Output B: torque, min.	2
Output B: wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Output B: wire cross-section stranded with wire-end ferrules, min.	1,5 mm ²
Output B: wire cross-section stranded, max.	4
Output B: wire cross-section stranded, min.	1,5 mm ²
Output C: diameter	5 mm
Output C: torque, max.	3
Output C: torque, min.	2
Output C: wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Output C: wire cross-section stranded with wire-end ferrules, min.	1,5 mm ²
Output C: wire cross-section stranded, max.	4 mm ²
Output C: wire cross-section stranded, min.	1,5 mm ²
Output D: diameter	6 mm
Output D: torque, max	3
Output D: torque, min.	2
Output D: wire coss-section stranded, min	4 mm ²
Output D: wire cross-section stranded with wire-end ferrules, max	6 mm ²
Output D: wire cross-section stranded with wire-end ferrules, min	2,5 mm ²
Output D: wire cross-section stranded, max	10 mm ²

Screw type	Galvanized steel screws
Short-circuit current resistance ICW over 1s	4,2 kA
Short-circuit current resistance IPK (peak value)	20 kA
Trieda krytia	IP20
Width (P)	50 mm

