




KOMPAKTNÍ DISTRIBUČNÍ BLOKY

RPU3005

Unipolárny distribučný blok - RPU 160-9

- Samostatné vstupy
- Jednoduché zapojenie
- Vráťane skrutiek z pozinkovanej ocele
- Rýchle pripojenie na DIN lištu

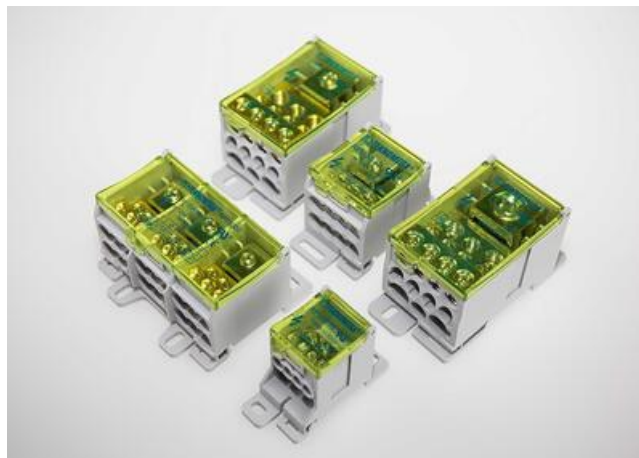

POPIS PRODUKTU

ŠPECIFIKÁCIA

Connections	10
Height (A)	75 mm
Input A: wire cross-section stranded, max.	70 mm ²
Input A: wire cross-section stranded, min.	10 mm ²
Input A: wire cross-section with wire-end ferrules, max.	50 mm ²
Input A: wire cross-section with wire-end ferrules, min.	10 mm ²
Input B: wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Input B: wire cross-section stranded, max.	16 mm ²
Input B: wire cross-section stranded, min.	6 mm ²
Input B: wire cross-section, stranded with wire-end ferrules, min.	6 mm ²
Length (B)	40 mm
Nominal insulation voltage	600 V
Number of inputs A	1
Number of inputs B	1
Number of outputs A	8
Output A: wire cross-section stranded with wire-end ferrules, max.	16 mm ²

Output A: wire cross-section stranded with wire-end ferrules, min. 2,5 mm²

Output A: wire cross-section stranded, max. 16 mm²

Output A: wire cross-section stranded, min. 2,5 mm²

Screw type Galvanized steel screws

Short-circuit current resistance ICW over 1s 11 kA

Short-circuit current resistance IPK (peak value) 30 kA

Trieda krytia IP20

Width (C) 48 mm

