




KOMPAKTNÍ DISTRIBUČNÍ BLOKY

RPU3015

Unipolárny distribučný blok 400 A - RPU 400-11

- Samostatné vstupy
- Jednoduché zapojenie
- Vráťane skrutiek z pozinkovanej ocele
- Rýchle pripojenie na DIN lištu

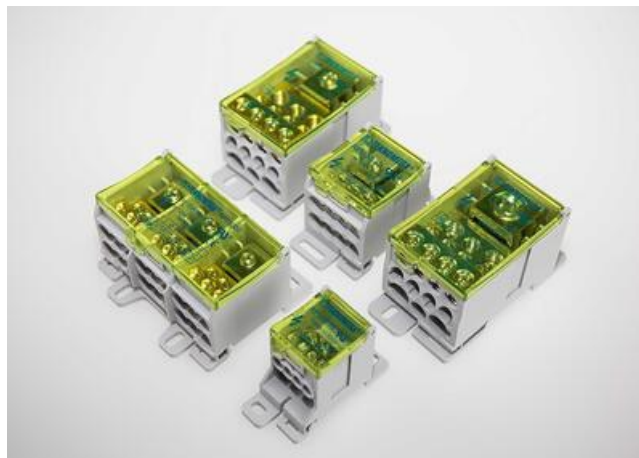

POPIS PRODUKTU

ŠPECIFIKÁCIA

Connections	12
Height (A)	96 mm
Input A: wire cross-section stranded, max.	185 mm ²
Input A: wire cross-section stranded, min.	95 mm ²
Input A: wire cross-section with wire-end ferrules, max.	120 mm ²
Input A: wire cross-section with wire-end ferrules, min.	95 mm ²
Length (B)	47 mm
Nominal insulation voltage	600 V
Number of inputs A	1
Number of outputs A	2
Number of outputs B	5
Number of outputs C	4
Output A: wire cross-section stranded with wire-end ferrules, max.	25 mm ²
Output A: wire cross-section stranded with wire-end ferrules, min.	6 mm ²
Output A: wire cross-section stranded, max.	35 mm ²
Output A: wire cross-section stranded, min.	6 mm ²

Output B: wire cross-section stranded with wire-end ferrules, max. 16 mm²

Output B: wire cross-section stranded with wire-end ferrules, min. 2,5 mm²

Output B: wire cross-section stranded, max. 16

Output B: wire cross-section stranded, min. 2,5 mm²

Output C: wire cross-section stranded with wire-end ferrules, max. 10 mm²

Output C: wire cross-section stranded with wire-end ferrules, min. 2,5 mm²

Output C: wire cross-section stranded, max. 10 mm²

Output C: wire cross-section stranded, min. 2,5 mm²

Screw type Galvanized steel screws

Short-circuit current resistance ICW over 1s 21 kA

Short-circuit current resistance IPK (peak value) 51 kA

Trieda krytia IP20

Width (C) 50 mm

