



Dopyt


ELEKTROMAGNET ERM

Séria ERM

ERM100/35



- Obdĺžnikový elektromagnet
- Vinutie triedy B (130°C)
- 100 % pracovný cyklus
- Sila až 7450N
- K dispozícii špeciálne prevedenie

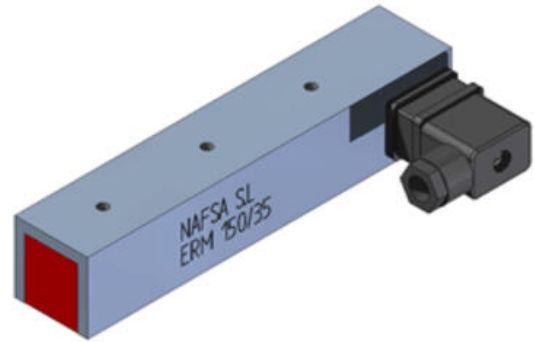

POPIS PRODUKTU

ŠPECIFIKÁCIA

Duty cycle	100 %
Insulation class	B (130°C)
Max. napätie DC	24 V
Total weight	900 g
Trieda krytia	IP65
Výkon	10 W

TYPE	P at 20°C (W)	e (mm)	Airgap (mm)					Magnetic force Fm (N)
			0	0,1	0,2	0,5	1	
ERM100/35	1	32	22	12	8	6	0,9	
	3	396	308	120	45	8	1	
	6	604	320	190	52	12	1,5	
ERM150/35	1	65	50	30	21	14	2,8	
	3	769	580	220	82	17	3,8	
	6	1090	657	368	90	21	4,5	
ERM200/35	1	80	60	42	28	14	2,3	
	3	928	720	260	94	20	3	
	6	1400	810	460	121	27	3,3	
ERM400/35	1	172	131	91	60	35	4,5	
	3	2100	1480	537	210	45	2,3	
	6	3860	1722	962	263	60	3	
ERM500/35	1	210	150	100	60	36	7,8	
	3	2323	1806	674	234	56		
	6	3640	2190	1114	295	70		
ERM600/35	1	226	173	90	66	40		
	3	2653	2053	706	266	66		
	6	4053	2366	1296	346	80		
ERM150/60	1	140	112	102	75	50		
	3	780	680	600	445	190		
	6	1800	1490	1100	610	290		
ERM200/60	1	205	165	155	116	72		
	3	1130	990	890	680	250		
	6	2550	2160	1900	884	290		
ERM500/60	1	453	440	397	310	190		
	3	3150	2630	2320	1800	780		
	6	7250	5870	4850	2380	850		
ERM500/60	10	7450	5950	4820	2410	910		

TYPE	A	B	C	D	E	F	H	Nº of holes	Compression gland	Weight/kg
ERM100/35	125					10		2		0,9
ERM150/35	176					10		3		1
ERM200/35	225					10		4		1,5
ERM400/35	425	36x0,3	34x0,1	25	50	12		M-6	PG-9	3,8
ERM500/35	525					12				4,5
ERM600/35	625					12				4,5
ERM150/60	160	80x0,1	49,5x0,2	40	70	12		M-8	PG-11	2,3
ERM200/60	230			40	120	12				3
ERM500/60	530			70	120	12				7,8

