




Dopyt

ELEKTROMAGNET ERM

Séria ERM

ERM100/35

- Obdĺžnikový elektromagnet
- Vinutie triedy B (130°C)
- 100 % pracovný cyklus
- Sila až 7450N
- K dispozícii špeciálne prevedenie

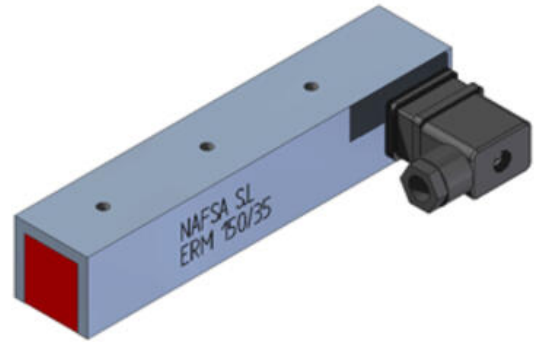

POPIS PRODUKTU

ŠPECIFIKÁCIA

Duty cycle	100 %
Insulation class	B (130°C)
Max. napätie DC	24 V
Total weight	900 g
Trieda krytia	IP65
Výkon	10 W

TYPE	P at 20°C (W)	e (mm)	Airgap (mm)					Magnetic force Fm (N)
			0	0,1	0,2	0,5	1	
ERM100/35	10	1	32	22	12	8	6	
	3	396	308	120	45	8		
	6	604	320	190	52	12		
ERM150/35	14	1	65	50	30	21	14	
	3	769	590	220	82	17		
	6	1090	657	368	90	21		
ERM200/35	18	1	925	720	260	94	20	
	3	1400	810	460	121	27		
	6	1758	1108	690	136	46		
ERM400/35	30	1	1722	1331	911	161	35	
	3	2100	1490	537	210	45		
	6	3060	1722	962	263	60		
ERM500/35	45	1	2100	1500	1000	60	36	
	3	2323	1806	674	234	56		
	6	3640	2100	1114	295	70		
ERM600/35	53	1	2653	2053	706	266	66	
	3	4053	2366	1296	346	80		
	6	5026	3120	1806	400	120		
ERM150/60	25	1	140	112	102	75	50	
	3	780	680	600	445	190		
	6	1800	1490	1100	610	290		
ERM200/60	40	1	1900	1500	1250	650	210	
	3	265	165	155	116	72		
	6	1130	990	890	680	250		
ERM500/60	75	1	2550	2160	1900	884	290	
	3	3150	2630	2320	1800	790		
	6	7250	5670	4650	2380	650		
ERM500/60	75	1	455	440	397	310	190	
	3	3150	2630	2320	1800	790		
	6	7250	5670	4650	2380	650		
ERM500/60	75	1	7450	5950	4820	2410	910	
	3	3150	2630	2320	1800	790		
	6	7250	5670	4650	2380	650		

TYPE	A	B	C	D	E	F	H	Nº of holes	Compression gland	Weight/kg
ERM100/35	125					10		2		0,9
ERM150/35	176					10		3		1
ERM200/35	225					10		4		1,5
ERM400/35	425	36x0,3	34x0,1	25	50	12		M-6	PG-9	3,6
ERM500/35	525					12				3,6
ERM600/35	625					12				4,5
ERM150/60	160	80x0,1	49,5x0,2	40	70					2,3
ERM200/60	230			40	120	12		M-8	PG-11	3
ERM500/60	530			70	120					7,8

