




ELEKTROMAGNETICKÝ ZÁMOK CU20/CP

Séria CP20/CP

CU20/CP



- Bezpečný zámok
- Vinutie triedy E (120°C)
- Vypnutie bez napájania
- Sila až 1,75N
- K dispozícii špeciálne prevedenie

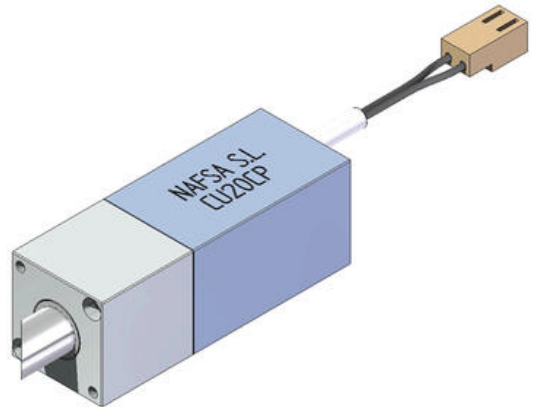

POPIS PRODUKTU

ŠPECIFIKÁCIA

Absorbed power @ 20°C, 100% duty	4,2 W
Absorbed power @ 20°C, 25% duty	17 W
Duty cycle	100 %
Insulation class	E(120°C)
Max radial force using body mount	2000 N
Max radial force using frontal fixing	750 N
Max. napätie DC	48 V
Min. napätie DC	12 V
Plunger weight	17 g
Return spring force	1,5 N
Temperature rise	70 °C
Total weight	107 g
Trieda krytia	IP40
Zdvih	7 mm

