



SAMOSTATNÉ VIACTÓNOVÉ SIRÉNY SÉRIE ES1 / ES2

Série ES1/ES2

C115200113
ES2 siréna biela 32 tónov 230 V

- Výber zo 32 druhov tónov
- 86 - 106 dB
- Krytie IP65
- Priaznivá cena



POPIS PRODUKTU

Sirény pre vnútorné i vonkajšie použitie (IP 65), druh tónu je voliteľný DIP-prepínačom vnútri. Oba typy možno objednať v červenej a bielej farbe.

ŠPECIFIKÁCIA

Druh montáže	Nezávislý
Farba tela	Biela
Frekvencia max	2850 Hz
Frekvencia min	440 Hz
Hladina zvuku max	107 dB
Hladina zvuku min	77 dB
Hmotnosť	295 g
Menovitý prúd max	0,035 A
Menovitý prúd min	0,006 A
Napájacie napätie AC max.	230 V AC
Napájacie napätie AC min.	120 V AC
Ovládanie zvuku	Áno
Počet tónov	32 ks
Prevádzková teplota max.	70 °C
Prevádzková teplota min.	-20 °C
Priemer	105 mm
Prierez vodičov	2,5 mm ²

Spotreba max.

0,012 A




Trieda krytia

IP65

The sound pressure decreases by 6 dB when doubling the distance, the following distance table is to be seen as Indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																				
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
100																					
200																					
500																					

The sound pressure decreases by 6 dB when doubling the distance

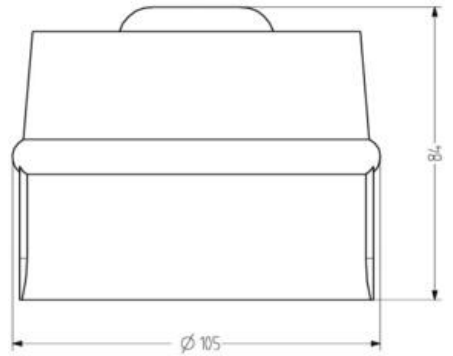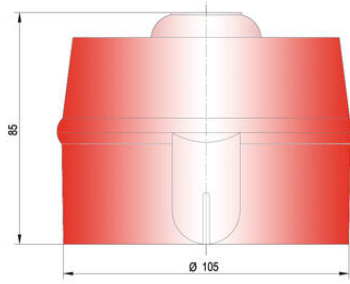

Tone table

ES2

No.	Spec	Off switch	2nd stage alarm (Hz)
1	Wavle tone 800/1000 Hz @ 0.5 sec	0001	800
2	Wavle tone 800/1000 Hz @ 0.25 sec	0010	1000
3	Intermittent tone 800 Hz @ 0.5 sec on/off	0011	800
4	Intermittent tone 1000 Hz @ 0.25 sec on/off	0010	1000
5	Slow Whistle 500-1000 Hz in 3 sec then 0.5 sec off	0011	500
6	Slow Whistle 1000-500 Hz in 3 sec then 0.5 sec off	0010	1000
7	Australian Slow Whistle 800-1000 Hz in 3.5 sec 0.25 sec off	0001	800
8	L.F. Sireny Frequency 800-1000 Hz in 0.5 sec	0001	800
9	L.F. Sireny Frequency 1000-800 Hz in 0.25 sec	0011	800
10	L.F. Sireny Frequency 800-1000 Hz in 0.5 sec	0010	800
11	Beeper Frequency 1000-500 Hz in 1 sec	0010	1000
12	Wavle tone 500 Hz @ 0.5 sec	0001	500
13	Wavle tone 500 Hz @ 0.5 sec 1/4 Hz Hz for 0.5 sec	0001	500
14	Intermittent tone 660 Hz for 0.5 sec on/off	0001	660
15	Intermittent tone 660 Hz for 1.5 sec on/off	0001	660
16	Intermittent tone 660 Hz for 3.0 sec on/off	0001	660
17	Group of 3 Intermittent tone 1000 Hz @ 0.5 sec on/off then 1.5 sec off	0010	1000
18	Group of 3 Intermittent tone 1000/800 Hz @ 0.5 sec then 1.5 sec off	0010	1000
19	Group of 3 Intermittent tone 1000/1000 Hz in 0.5 sec on/off then 1.5 sec off	0010	1000
20	Group of 3 Intermittent tone 1000-500 Hz in 0.5 sec then 1.5 sec off	0010	1000
21	Linear Frequency sweep 2000-2000 Hz in 0.5 sec	0000	2000
22	Linear Frequency sweep 2000-2000 Hz in 0.25 sec	0000	2000
23	H.F. wavle tone 2000/2000 Hz @ 0.5 sec	0000	2000
24	H.F. wavle tone 2000/2000 Hz @ 0.25 sec	0000	2000
25	H.F. Intermittent tone 2000 Hz @ 0.5 sec on/off	0000	2000
26	H.F. Intermittent tone 2000 Hz @ 0.25 sec on/off	0000	2000
27	Wing tone H.F. sweep 2000-2000 Hz in 0.5 sec (2 Hz)	0000	2000
28	Fast H.F. sweep 2000-2000 Hz in 0.25 sec (2 Hz)	0000	2000
29	H.F. Sweep 2000-2000 Hz in 0.5 sec (2 Hz)	0000	2000
30	2 way tone, 500-1000, rising then falling in 0.25 sec	0000	500
31	Slow 2 way tone, 3 sec, rising then 1 sec falling, 1000-500 Hz	0000	500
32	Ching Ding group 2000-0 Hz, then 500-80 Hz off for 1 sec	00000	500

The sound pressure decreases by 6 dB when doubling the distance, the following distance table is to be seen as Indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																				
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90
100																					
200																					
500																					

The sound pressure decreases by 6 dB when doubling the distance