



BZUČIAKY SÉRIE ES * DO OTVORU Ø 22 MM

Série ES

812510313
ESV čierna siréna 230 V

- Pre vnútorné i vonkajšie použitie
- Nastaviteľná hlasitosť pomocou trimra (ESG a ESM)
- Až 3 druhy signalizácie (ESG)
- Montáž do otvoru Ø 22 mm (priamo) alebo 30 mm (s adaptérom)



POPIS PRODUKTU

Bzučiaky majú malé vonkajšie rozmery a dobré krytie, sú teda vhodné pre montáž na rozvádzač či dispečerský pult ako upozornenie obsluhy.

ŠPECIFIKÁCIA

Farba tela	Čierna
Frekvencia max	3500 Hz
Hladina zvuku max	85 dB
Hladina zvuku min	80 dB
Hmotnosť	30 g
Maximálny počet modulov	0 ks
Menovitý prúd max	0,04 A
Napájacie napätie AC / DC min.	10 V
Počet tónov	2 ks
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Priemer	30 mm
Prierez vodičov	2,5 mm ²
Trieda krytia	IP65

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.


Distance (m)	Sound pressure dB (A)																			
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	120
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	114
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	110
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	100
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	94
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	90
50	30	35	40	45	50	55	57	59	61	63	65	67	69	71	73	75	77	79	81	85
100																				
200																				
500																				

The sound pressure decreases by 6 dB when doubling the distance

Tone table

Tone and light selection on terminal		
to	to	to
X	X	pushing tone / LED flashing light
X	X	continuous tone / steady light

ESV

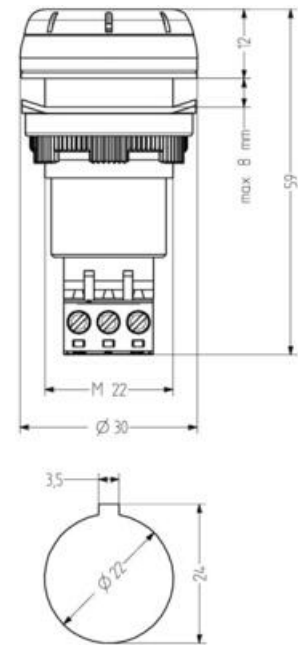

Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)



The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																			
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	120
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	114
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	110
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	100
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	94
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	90
50	30	35	40	45	50	55	57	59	61	63	65	67	69	71	73	75	77	79	81	85
100																				
200																				
500																				

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

