



BZUČIAKY SÉRIE ES * DO OTVORU Ø 22 MM

Série ES

813500405
ESM čierna siréna 24 V

- Pre vnútorné i vonkajšie použitie
- Nastaviteľná hlasitosť pomocou trimra (ESG a ESM)
- Až 3 druhy signalizácie (ESG)
- Montáž do otvoru Ø 22 mm (priamo) alebo 30 mm (s adaptérom)



POPIS PRODUKTU

Bzučiaky majú malé vonkajšie rozmery a dobré krytie, sú teda vhodné pre montáž na rozvádzač či dispečerský pult ako upozornenie obsluhy.

ŠPECIFIKÁCIA

Farba tela	Čierna
Frekvencia max	3300 Hz
Hladina zvuku max	100 dB
Hladina zvuku min	85 dB
Hmotnosť	35 g
Maximálny počet modulov	0 ks
Menovitý prúd max	0,019 A
Menovitý prúd min	0,019 A
Napájacie napätie AC / DC max.	24 V
Napájacie napätie AC / DC min.	8 V
Počet tónov	2 ks
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Priemer	45 mm
Prierez vodičov	2,5 mm ²

Spotreba max.

0,019 A

Trieda krytia

IP65

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	
100		40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80			
200		39	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74				
500		38	40	42	44	46	48	50	52	54	56	58	60	62	64	66						


The sound pressure decreases by 6 dB when doubling the distance.

The sound pressure decreases by 6 dB when doubling the distance

Tone table

Tone set terminal		
La	N	Lb
X	X	pushing tone
X	X	continuous tone

ESM

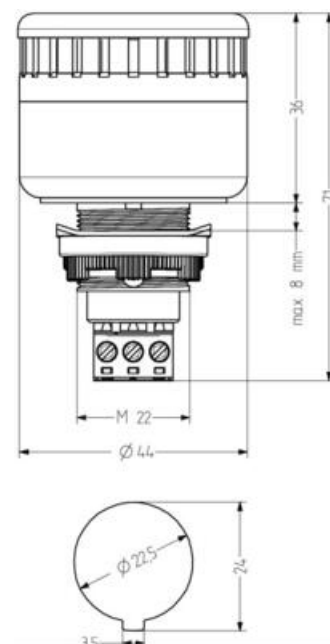

Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)



The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	
100		40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80			
200		39	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74				
500		38	40	42	44	46	48	50	52	54	56	58	60	62	64	66						

The sound energy decreases by 6 dB when doubling the distance.

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

