



BZUČIAKY SÉRIE ES * DO OTVORU Ø 22 MM

Série ES

814500405
ESG čierna siréna 24 V

- Pre vnútorné i vonkajšie použitie
- Nastaviteľná hlasitosť pomocou trimra (ESG a ESM)
- Až 3 druhy signalizácie (ESG)
- Montáž do otvoru Ø 22 mm (priamo) alebo 30 mm (s adaptérom)



POPIS PRODUKTU

Bzučiaci majú malé vonkajšie rozmery a dobré krytie, sú teda vhodné pre montáž na rozvádzač či dispečerský pult ako upozornenie obsluhy.

ŠPECIFIKÁCIA

Farba tela	Čierna
Frekvencia max	3300 Hz
Hladina zvuku max	105 dB
Hladina zvuku min	85 dB
Hmotnosť	65 g
Maximálny počet modulov	0 ks
Menovitý prúd max	0,057 A
Menovitý prúd min	0,057 A
Napájacie napätie AC / DC max.	24 V
Napájacie napätie AC / DC min.	8 V
Počet tónov	3 ks
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Priemer	65 mm
Prierez vodičov	2,5 mm ²

Spotreba max.

0,057 A

Trieda krytia

IP65

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.



Distance (m)	Sound pressure dB (A)																		
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76	78	80	82
100																			
200																			
500																			

The sound pressure decreases by 6 dB when doubling the distance

Tone table

Tone as horizontal			
La	N	Lb	
X	X	X	pulling tone
X	X	X	switching tone
X	X	X	continuous tone

ESG

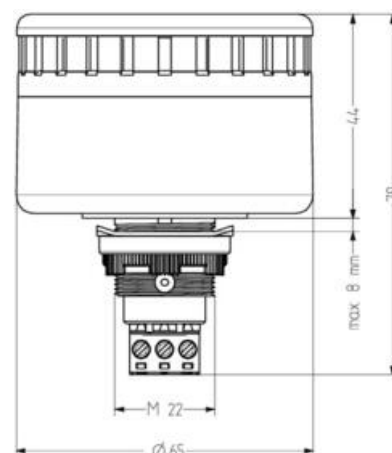

Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)



The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																		
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76	78	80	82
100																			
200																			
500																			

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

