



KOMBINOVANÁ SIRÉNA CS1 S BLIKAČOM, PRIEMER 93 MM

Série CS1

C111621005

CS1 siréna/záblesk LED oranžová 24 V

- Rýchla inštalácia vďaka systému bajonetových zámkov
- Výber z 32 tónov
- Akustická intenzita 86 - 106 dB
- Krytie IP65




POPIS PRODUKTU

Sirény pre vnútorné a vonkajšie použitie (IP 65), druh tónu je voliteľný DIP-prepínačom vnútri. Oba typy možno objednať v bielej a červenej farbe.

ŠPECIFIKÁCIA



Druh montáže	Horizontálny, Vertikálny
Farba	Oranžová
Farba tela	Červená
Frekvencia blikania	1 Hz
Frekvencia max	2900 Hz
Frekvencia min	440 Hz
Hladina zvuku max	109 dB
Hladina zvuku min	88 dB
Hmotnosť	258 g
Menovitý prúd max	0,041 A
Menovitý prúd min	0,014 A
Napájacie napätie	24 V
Napájacie napätie AC / DC max.	35 V
Napájacie napätie AC / DC min.	18 V
Ovládanie zvuku	Áno

Počet tónov	32 ks
Prevádzková teplota max.	70 °C
Prevádzková teplota min.	-20 °C
Trieda krytia	IP65
Typ zdroja	Oranžová LED
Zdroj svetla	LED

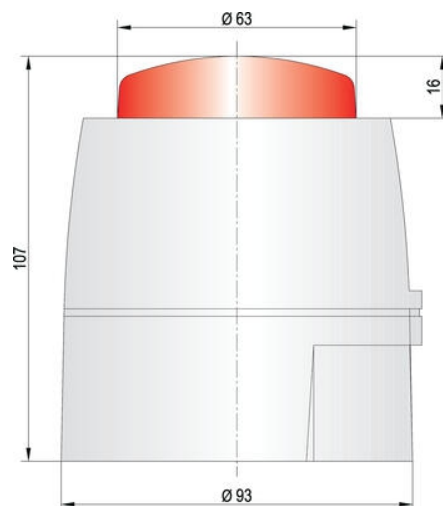

Tontabelle / Tone table

No.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Siren	800 Hz on 0.5 sec	11111	800 cont
2	Overhead siren BS standard	920 Hz on 2s	11111	800 cont
3	Mobile Tone BS standard	800/1000 Hz on 0.5 sec	11101	800 cont
4	Overhead siren BS standard	1000 Hz on 2s	11100	800 cont
5	LF Back up siren	800 Hz on 0.5 sec on/off	11011	200 cont
6	LF Back up alarm	800 Hz on 1.0 sec on/off	11010	800 cont
7	LF Back up siren and tone - Int	800 Hz on 1.0 sec on/off	11001	800 cont
8	LF Overhead tone BS/BS2	800 Hz cont	11000	Siren tone
9	Overhead tone 1190	800/200 Hz on 1 Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970 Hz 0.25 sec on/0.25 sec off	10110	3.75 sec on 0.25 sec off 800/200
11	Dutch sweep tone	970 Hz cont	10101	800 cont 0.5 sec on/off
12	Overhead siren tone	1000 Hz on 2s	10100	800 cont
13	Overhead tone 25 Hz	800/25 Hz on 2s	10011	800 cont
14	Overhead LF siren tone	800/800 Hz on 2s	10010	200 cont
15	Overhead siren	800/800 Hz on 2s	10001	200 cont
16	US Temporal Pattern LF	250 Hz for 0.5 sec on 0.5 sec off	10000	800 cont
17	Intermittent tone BS standard	Intermittent tone 800 Hz on 0.5 sec on/off	01111	800 cont
18	BS BS21 LF BS/BS21 P1 1190	Intermittent 970 Hz 0.25 sec on/0.25 sec off	01110	Siren tone
19	Intermittent tone BS21	1000 Hz on 0.5 sec on/off	01101	800 cont
20	BS/BS21 LF	Intermittent 200 Hz 100 ms on 400 ms off	01100	Siren tone
21	Continuous tone	800 Hz cont	01011	Siren tone
22	LF Siren	800/800 Hz on 1 Hz	01010	800 cont
23	LF Chirp tone	800 Hz	01001	200 cont
24	Overhead tone 25 Hz	800/25 Hz on 2s	01000	800 cont
25	German LF tone	Siren 1200/800 Hz on 1 Hz	00111	800 cont
26	Overhead tone 1190	Intermittent 660 Hz 350 ms on / 550 ms off	00110	Siren tone
27	French tone BS/BS2	1000 Hz for 100 ms and 1000 Hz for 500 ms	00100	800 cont
28	Overhead LF siren	Continuous 800 Hz	00101	Siren tone
29	US Temporal Pattern LF	200 Hz for 0.5 sec on 0.5 sec off	00011	200 cont
30	Siren 2 tone ramp 1/short	800/200 Hz rising then falling @ 25 Hz	00010	800 cont
31	PP 1000 Hz - 1 tone	Intermittent tone 800/700 Hz on 2s	00000	800 cont
32	Siren 2 tone ramp 1/long	800/200 Hz 3 sec rising / 3 sec falling	00001	800 cont

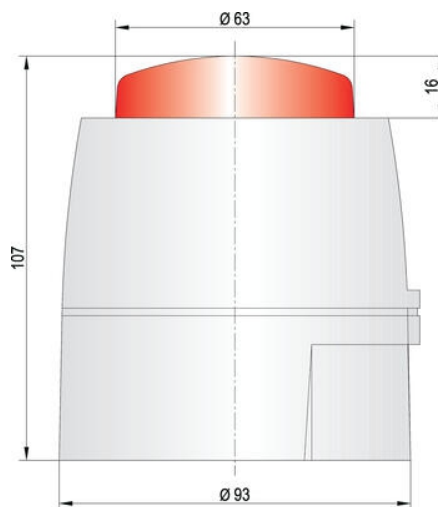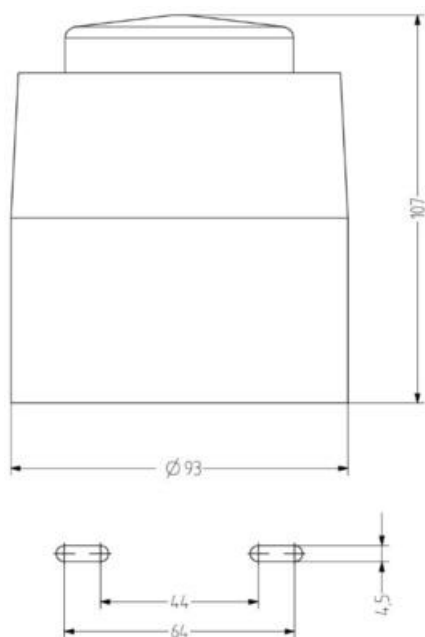

Nr.	Sound	Tone frequency	DR switch	2nd stage alarm (Hz)
1	U.F. Buzzer	800 - 1000Hz at 0.5 sec	11111	800 cont
2	Alarm tone (U.F. stopped)	800/500Hz at 2Hz	11110	800 cont
3	Warning tone (U.F. stopped)	800/1000Hz at 0.5 sec	11101	800 cont
4	Alarm tone (U.F. stopped)	800/500Hz at 2Hz	11100	800 cont
5	U.F. Buzzer at interrupted tone	800Hz at 1.0 sec on/off	11011	800 cont
6	U.F. Buzzer at 100ms	800Hz at 100 msec on/off	11010	800 cont
7	U.F. Buzzer at interrupted tone - fast	800Hz at 1.0 sec on/off	11001	800 cont
8	U.F. Continuous tone (2000)	800Hz cont	11000	800 tone
9	Alarm tone (1 Hz)	800/500Hz at 1Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	10110	500-1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	10101	0.5 sec on 0.5 sec off
12	Archiepope alarm tone	800/500Hz at 2Hz	10100	800 cont
13	Alarm tone (2 Hz)	800/500Hz at 2Hz	10011	800 cont
14	Alarm tone (U.F. slow pulse)	800/500Hz at 2Hz	10010	800 cont
15	U.F. Buzzer - normal	800/500Hz at 0.5 sec	10001	800 cont
16	US Temporal Pattern (F)	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Interrupted tone (S) standard	Intermittent tone 800Hz at 0.5 sec on/off	01111	800 cont
18	ISO 8001 IF (ISO 8001 Ph 1.9B)	Intermittent 970Hz 500ms on/500ms off	01110	800 tone
19	Intermittent tone - medium	1000Hz at 1.0 sec on/off	01101	800 cont
20	ISO 8001 IF	Intermittent 1000Hz 500ms on 500ms off	01100	800 tone
21	Continuous tone	1000Hz continuous	01011	800 tone
22	U.F. Buzzer	800/500Hz on/off at 112Hz	01010	800 cont
23	U.F. Continuous	800Hz	01001	800 cont
24	Alarm tone (2 Hz)	800/500Hz at 2Hz	01000	800 cont
25	German (DR) tone	Intermittent 800/500Hz at 1Hz	00111	800 cont
26	Swedish Fire alarm	Intermittent 650Hz 150 ms on / 500 ms off	00110	800 tone
27	French tone at 90	1000Hz for 100 ms and within 1000ms	00100	800 cont
28	Swedish at short signal	Continuous 800Hz	00100	800 tone
29	US Temporal Pattern (F)	800Hz for 0.5 sec on 0.5 sec off x3 off for 1.5 sec then repeat	00011	800 cont
30	Alarm 2 - emergency (F) short	800/500Hz rising then falling 0.25 sec	00010	800 cont
31	U.F. (2 Hz) 1.1 Hz tone	Intermittent tone 800/500Hz rising/falling	00000	800 cont
32	Alarm 2 - emergency (F) long	800/500Hz 3 sec rising / 3 sec falling	00000	800 cont

