Dopyt

ANALÝZA PLYNOV A KVAPALÍN

VODIVOST
Kontrolné a snímacie jednotky

- Vodivosť
- pH / Redox
- O2 vo vzduchu a kvapalinách
- CO / CO2
- Ručné prístroje






POPIS PRODUKTU

ŠPECIFIKÁCIA

Materiál elektródy	EPDM, Grafit, Keramika, PA, PVC, PVDF, Nerezová oceľ
Teplota média do	200 °C
Teplota média od	-10 °C
Tlakový rozsah max.	60 bar
Tlakový rozsah min.	0 bar
Trieda krytia	IP65, IP67

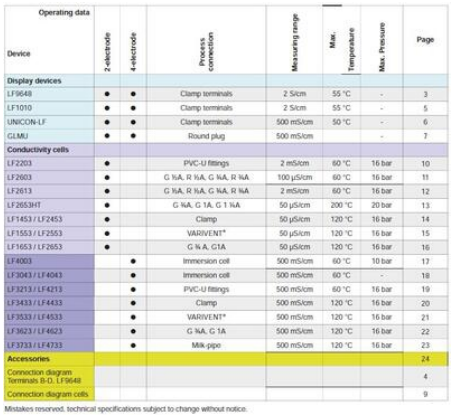

Operating data / Device	2-electrode	4-electrode	Process connection	Measuring range	Max. Temperature	Max. Pressure	Page
Display devices							
LF9648	●	●	Clamp terminals	2 S/cm	55 °C	-	3
LF1010	●	●	Clamp terminals	2 S/cm	55 °C	-	5
UNICON-LF	●	●	Clamp terminals	500 mS/cm	50 °C	-	6
GLMU	●	●	Round plug	500 mS/cm		-	7
Conductivity cells							
LF2203	●		PVC-U fittings	2 mS/cm	60 °C	16 bar	10
LF2603	●		G ¾A, R ¾A, G ¾A, R ¾A	100 µS/cm	60 °C	16 bar	11
LF2613	●		G ¾A, R ¾A, G ¾A, R ¾A	2 mS/cm	60 °C	16 bar	12
LF2653HT	●		G ¾A, G 1A, G 1 ¼A	50 µS/cm	200 °C	20 bar	13
LF1453 / LF2453	●		Clamp	50 µS/cm	120 °C	16 bar	14
LF1553 / LF2553	●		VARIVENT®	50 µS/cm	120 °C	16 bar	15
LF1653 / LF2653	●		G ¾ A, G1A	50 µS/cm	120 °C	16 bar	16
LF4003		●	Immersion cell	500 mS/cm	60 °C	10 bar	17
LF3043 / LF4043		●	Immersion cell	500 mS/cm	60 °C	-	18
LF3213 / LF4213		●	PVC-U fittings	500 mS/cm	60 °C	16 bar	19
LF3433 / LF4433		●	Clamp	500 mS/cm	120 °C	16 bar	20
LF3533 / LF4533		●	VARIVENT®	500 mS/cm	120 °C	16 bar	21
LF3623 / LF4623		●	G ¾A, G 1A	500 mS/cm	120 °C	16 bar	22
LF3733 / LF4733		●	Milk-pipe	500 mS/cm	120 °C	16 bar	23
Accessories							24
Connection diagram Terminals B-D, LF9648							4
Connection diagram cells							9

Mistakes reserved. technical specifications subject to change without notice.