




PIEZOELEKTRICKÉ BZUČIAKY

716149

Modul bzučiaka SUS-6149 24VDC



- Napájanie 24 V DC
- Menovitý prúd 0,03/0,018 A
- Intenzita zvuku 85/92 dB
- Montáž na DIN lištu a skrutku

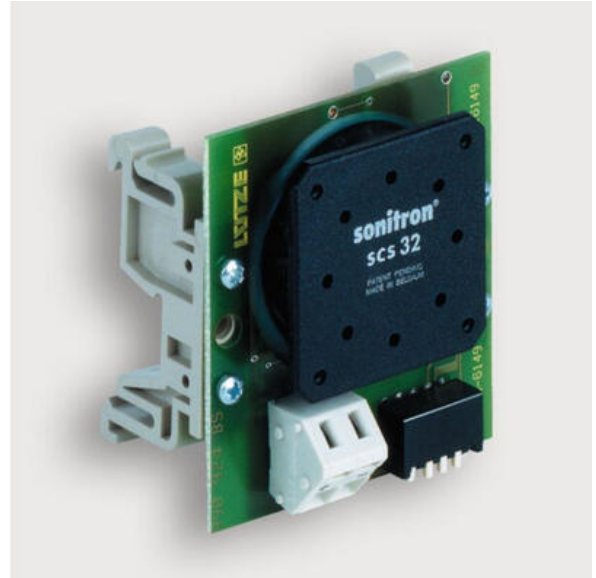

POPIS PRODUKTU

ŠPECIFIKÁCIA

2437_Frequency bandwidth (Hz)	200–4000
4526_Temperature range (°C)	-40...+70 (+85 10 min.)
5219_Sound pressure (dB)	92
Hmotnosť	0,028 kg
Montáž	DIN lišta
Napájacie napätie	24 V DC
Nominálny prúd	0,03 A
Rozmery	50×55×37 mm
Rozsah vstupného napätia	10–30 V DC
Typ pripojenia	Pružinová svorka
Zhoda s normami	EN 45545-2:2013+A1:2015, EN 50121-3-2:2016, EN 50155:2017, EN 50124-1:2017, EN 61373:2010



switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	OFF	200Hz
ON	OFF	OFF	OFF	260Hz
OFF	ON	OFF	OFF	300Hz
ON	ON	OFF	OFF	350Hz
OFF	OFF	ON	OFF	400Hz
ON	OFF	ON	OFF	450Hz
OFF	ON	ON	OFF	500Hz
ON	ON	ON	OFF	550Hz



switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	ON	600Hz
ON	OFF	OFF	ON	650Hz
OFF	ON	OFF	ON	700Hz
ON	ON	OFF	ON	800Hz
OFF	OFF	ON	ON	2500Hz
ON	OFF	ON	ON	3000Hz
OFF	ON	ON	ON	3600Hz
ON	ON	ON	ON	4000Hz

