



BZUČIAKY SÉRIE ES * DO OTVORU Ø 22 MM

Série ES

812500405
ESK čierna siréna 12-24 V

- Pre vnútorné i vonkajšie použitie
- Nastaviteľná hlasitosť pomocou trimra (ESG a ESM)
- Až 3 druhy signalizácie (ESG)
- Montáž do otvoru Ø 22 mm (priamo) alebo 30 mm (s adaptérom)



PRODUCT DESCRIPTION

Bzučiaky majú malé vonkajšie rozmery a dobré krytie, sú teda vhodné pre montáž na rozvádzač či dispečerský pult ako upozornenie obsluhy.



SPECIFICATIONS

Farba tela	Čierna
Frekvencia max	3500 Hz
Hladina zvuku max	65 dB
Hladina zvuku min	65 dB
Hmotnosť	30 g
Maximálny počet modulov	0 ks
Menovitý prúd max	0,04 A
Menovitý prúd min	0,04 A
Napájacie napätie AC / DC max.	24 V
Napájacie napätie AC / DC min.	10 V
Počet tónov	2 ks
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Priemer	30 mm
Prierez vodičov	2,5 mm ²

Tone table

Tone and frequency			
La	N	Lb	
X	X		pulling tone
X	X	X	continuous tone

ESK

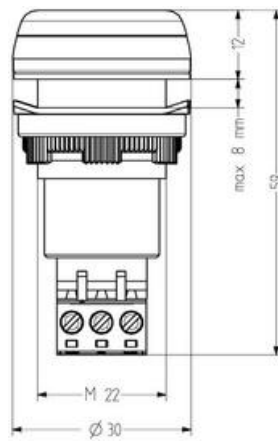

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76	78
100																
200																
500																

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

