




MERSEN

Polovod.nožová poistka, veľ. 0, 690 V 32 A



ŠPECIFIKÁCIA

Balenie	3 ks
Breaking Capacity	170 kA
Charakteristika (CVL)	aR
Indication (CVL)	Riadiaca hlavica, Vizuálny
Max. napätie AC	690 V
Nominálny prúd	32 A
Zhoda s normami	RU, CE, CSA

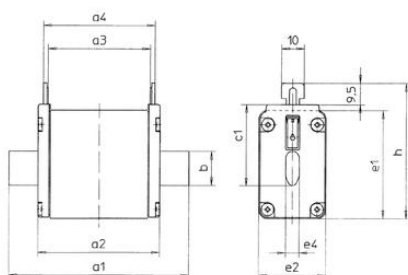

	SIL 00A	SIL 00	u6.0	Sf 1-16-100A	Sf 1-235-35SA	Sf 2-16-250A	Sf 2-300-500A	Sf 3-250-400A	Sf 3-425-800A
a1	79	79	125	135	135	150	150	150	150
a2	52	52	66.0	70.0	70.0	72.5	72.5	72.5	72.5
a3	45.5	45.5	61	63	63	63	63	63	63
a4	49.5	50	66	68	68	68	68	68	68
b	15	15	15	15	20	20	26	26	33
c1	35	35	35	40	40	48	48	60	60
c1	40.5	47.5	47.5	47.5	52.5	52.5	60	60	74
a2	60	29.5	29.5	29.5	39.5	39.5	51	51	70
e4	6.0	6	6	6	6	6	6	6	6
f	68	68	68	68	68	70.5	70.5	70.5	70.5

