




NH1UD69V63PV
Polovod.nožová poistka, veľ. 1, 690 V 63 A



SPECIFICATIONS

Balenie	3 ks
Breaking Capacity	170 kA
Charakteristika (CVL)	aR
Indication (CVL)	Riadiaca hlavica, Vizuálny
Max. napätie AC	690 V
Nominálny prúd	63 A
Zhoda s normami	RU, CE, CSA

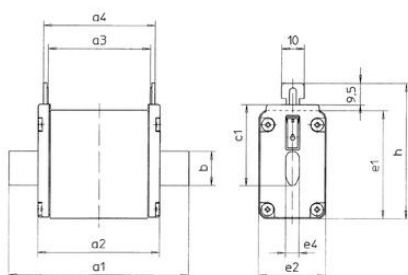

	StL 000	StL 00	uL0	StL 16-100A	StL 125-355A	StL 26-250A	StL 200-1000A	StL 250-400A	StL 425-800A
a1	79	79	125	135	135	150	150	150	150
a2	52	52	68.0	70.0	70.0	72.3	72.3	72.3	72.3
a3	45.5	45.5	61	63	63	63	63	63	63
a4	49.5	50	66	68	68	68	68	68	68
b1	15	15	15	15	20	20	26	26	35
c1	35	35	35	40	40	48	48	60	60
a1	40.5	47.5	47.5	47.5	52.5	52.5	60	60	74
a2	20.8	29.5	29.5	29.5	39.5	39.5	51	51	70
a4	6.0	6.0	6.0	6	6	6	6	6	6
b1	15	15	15	15	20	20	26	26	35
c1	35	35	35	40	40	48	48	60	60
a1	40.5	47.5	47.5	47.5	52.5	52.5	60	60	74
a2	20.8	29.5	29.5	29.5	39.5	39.5	51	51	70
a4	6.0	6.0	6.0	6	6	6	6	6	6

