




MERSEN

Polovod.nožová poistka, veľ. 3, 690 V 315 A



ŠPECIFIKÁCIA

Balenie	3 ks
Breaking Capacity	170 kA
Charakteristika (CVL)	aR
Indication (CVL)	Riadiaca hlavica, Vizuálny
Max. napätie AC	690 V
Nominálny prúd	315 A
Zhoda s normami	CE, CSA, RU

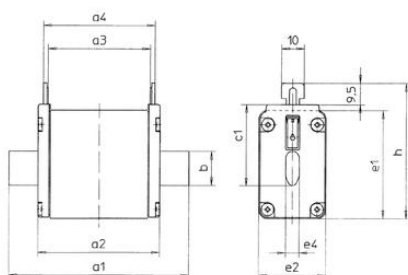

	StL 000	StL 00	uL0	StL 1-1000A	StL 1-235-35A	StL 2-16-250A	StL 2-300-500A	StL 3-250-400A	StL 3-425-600A
a1	79	79	125	135	135	150	150	150	150
a2	52	52	66	70	70	72.5	72.5	72.5	72.5
a3	45.5	45.5	61	63	63	63	63	63	63
a4	49.5	50	66	68	68	68	68	68	68
b	15	15	15	15	20	20	26	26	33
c1	35	35	35	40	40	48	48	60	60
c1	40.5	47.5	47.5	47.5	52.5	52.5	60	60	74
a2	60	29.5	29.5	29.5	39.5	39.5	51	51	70
u4	6	6	6	6	6	6	6	6	6
u5	68	68	68	68	68	70	70	70	70

