



## PRIECHODKA PRIAMA, ŠTANDARD, PUSH-ON

Séra 1000

1050 4/2.7

Priechodka priama 4mm


- Teplota -20°C do 80°C
- Tlak max. 20 bar
- Telo z poniklovanej mosadze



### PRODUCT DESCRIPTION

### SPECIFICATIONS

|                          |                    |
|--------------------------|--------------------|
| Balenie                  | 10 ks              |
| Materiál matice          | Poniklovaná mosadz |
| Materiál tela            | Poniklovaná mosadz |
| Materiál tesnenia        | NBR                |
| Prevádzková teplota max. | 80 °C              |
| Prevádzková teplota min. | -20 °C             |
| Tvar tela                | I                  |
| Vnútorňý priemer hadičky | 2,7 mm             |
| Vonkajší priemer hadičky | 4 mm               |
| Zhoda s normami          | PED, REACH, RoHS   |

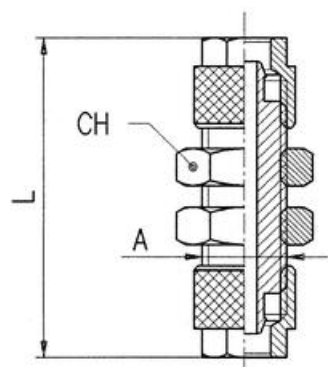

|               | A       | L    | CH |
|---------------|---------|------|----|
| 1050 4/2.7    | M6x0,35 | 39,6 | 10 |
| 1051 1/2      | M10x1   | 45,5 | 14 |
| 1050 8/6-6/4  | M12x1   | 47,3 | 17 |
| 1051 1/3      | M12x1   | 48,4 | 17 |
| 1050 10/8-6/4 | M14x1   | 49,8 | 17 |
| 1050 10/8-8/6 | M14x1   | 51,2 | 17 |
| 1051 1/4      | M14x1   | 54   | 17 |
| 1051 1/5      | M16x1   | 57   | 19 |
| 1050 15/12.5  | M20x1   | 59   | 24 |