



REDUKCIA PRIAMA, VONKAJŠÍ ZÁVIT

Séria ADAPTERS

2030 M5-1/8

Redukcia priama M5 - G1/8


- Teplota -20°C do 300°C
- Tlak max. 150 bar
- Telo z poniklovanej mosadze



PRODUCT DESCRIPTION

SPECIFICATIONS

Balenie	10 ks
Connection outside	G1/8, M5
Materiál tela	Poniklovaná mosadz
Prevádzková teplota max.	300 °C
Prevádzková teplota min.	-20 °C
Tlakový rozsah max.	150 bar
Tlakový rozsah min.	-0,99 bar
Tvar tela	I

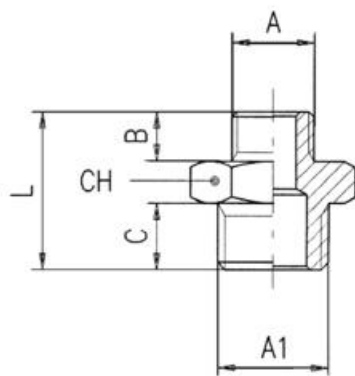

	A	A1	B	C	L	CH
2030 M5-1/8	M5	1/8	4	6	14,5	14
2030 1/8-1/4	1/8	1/4	6	8	19,0	17
2030 1/8-3/8	1/8	3/8	6	9	20,0	19
2030 1/4-3/8	1/4	3/8	8	9	22,0	19
2030 1/4-1/2	1/4	1/2	8	10	23,5	24
2030 3/8-1/2	3/8	1/2	9	10	24,5	24
2030 1/2-3/4	1/2	3/4	10	12	27,5	30