




Dopyt

ELEKTROMAGNET VEM

Séria VEM

VEM20

- Udržiavacia sila pod napätím
- Vinutie triedy B (130°C)
- 100% pracovný cyklus
- Sila do 7104N
- K dispozícii špeciálne prevedenie

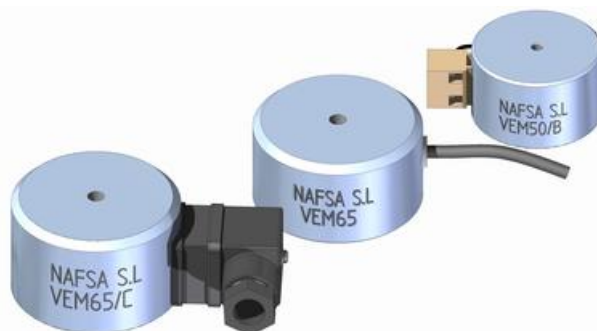


POPIS PRODUKTU

ŠPECIFIKÁCIA

Insulation class	B(130°C)
Max. napätie DC	24 V
Total weight	20 g
Trieda krytia	IP65
Typ napätia	DC
Výkon	1,6 W

TYPE	P at 20°C (W)	e (mm)	Air gap (mm) δ_L					
			0	0.1	0.2	0.5	1	
VEM20	1,6	1	14,5	3,8	1,6	0,3		Magnetic Force Fm (N)
		3	27	5,7	2,6	0,35		
		6	35	5,0	2,1	3,7		
VEM25	3,2	1	27	19	12	3		
		3	114	47	20	3,5		
		6	135	50	21	3,7		
VEM30	4	1	37	24	18	6	1,5	
		3	170	80	40	9,5	1,6	
		6	190	90	45	12	2	
VEM40	5,6	1	38	30	24	13	4	
		3	300	203	133	27	4,5	
		6	400	245	160	30	5	
VEM50	6,5	1	40	32	30	20	15	
		3	320	235	185	65	16	
		6	500	370	240	68	20	
VEM65	10	1	45	40	35	25	15	
		3	310	230	250	148	40	
		6	830	660	500	164	46	
VEM80	15	10	980	750	560	190	50	
		1	65	42	40	30	20	
		3	430	360	325	230	90	
VEM100	20	6	1150	970	830	375	110	
		10	2000	1350	1000	420	125	
		1	70	50	45	35	25	
VEM150	40	3	530	440	426	335	225	
		6	1400	1200	1050	730	310	
		10	2600	2200	1700	880	330	
		3	700	580	550	480	390	
		6	1810	1650	1580	1400	1100	
		10	5800	4350	3910	3000	1850	
		18	7104	5760	4992	3840	2400	

e (mm). Thickness of the piece to hold

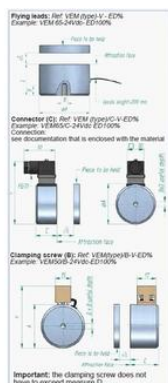

TYPE	AA (±0.3)	B	CSL1	D	E	F	Weight
VEM 20	20	M3	—	5	—	40	0.02
VEM 25	25	M4	20	6	—	40	0.02
VEM 30	30	M4	—	6	—	40	0.02
VEM 40	40	M5	25	8	—	50	0.20
VEM 50	50	M5	30	8	—	60	0.30
VEM 65	65	M6	38	12	127	95	0.80
VEM 80	80	M6	38	12	127	95	1.30
VEM 100	100	M8-10	42	12	147	110	2.10
VEM 150	150	M8-16	56	24	197	165	6.40