




ELEKTROMAGNET ERM

Séria ERM

ERM100/35

- Obdĺžnikový elektromagnet
- Vinutie triedy B (130°C)
- 100 % pracovný cyklus
- Sila až 7450N
- K dispozícii špeciálne prevedenie

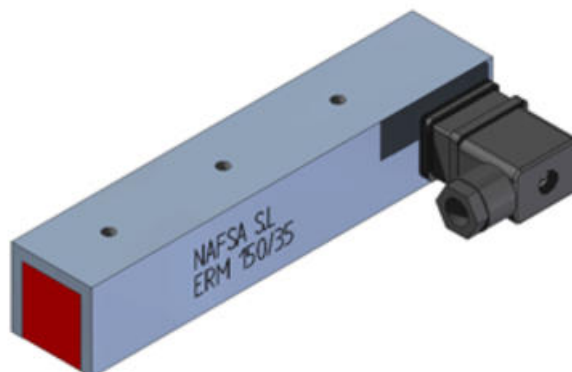

PRODUCT DESCRIPTION

SPECIFICATIONS

Duty cycle	100 %
Insulation class	B (130°C)
Max. napätie DC	24 V
Total weight	900 g
Trieda krytia	IP65
Výkon	10 W

TYPE	P at 20°C (W)	e (mm)	Airgap (mm)					
			0	0,1	0,2	0,5	1	
ERM100/35	10	1	32	22	12	8	6	Magnetic force Fm (N)
		3	396	308	120	45	8	
		6	694	328	190	52	12	
		10	752	468	238	60	18	
ERM150/35	14	1	65	50	30	21	14	
		3	769	580	220	82	17	
		6	1090	657	365	90	21	
		10	1450	904	490	116	35	
ERM200/35	18	1	80	60	42	28	14	
		3	928	720	260	94	20	
		6	1400	810	460	121	27	
		10	1758	1108	690	136	46	
ERM400/35	30	1	172	131	91	60	35	
		3	2100	1460	537	210	45	
		6	3060	1722	962	263	60	
		10	3610	2371	1297	304	93	
ERM500/35	45	1	210	150	100	60	36	
		3	2323	1806	674	234	56	
		6	3340	2100	1114	295	70	
		10	4423	2745	1501	330	117	
ERM600/35	53	1	226	173	90	66	40	
		3	2653	2053	706	266	66	
		6	4053	2256	1286	346	80	
		10	5026	3120	1806	400	120	
ERM150/60	25	1	140	112	102	75	50	
		3	750	680	600	445	160	
		6	1600	1490	1100	610	200	
		10	1900	1500	1250	650	210	
ERM200/60	40	1	205	165	155	116	72	
		3	1130	990	890	680	250	
		6	2550	2100	1800	884	280	
		10	2760	2300	1870	900	300	
ERM500/60	75	1	553	440	397	310	190	
		3	3150	2630	2320	1600	780	
		6	7250	5870	4850	2380	830	
		10	7450	5850	4820	2410	910	

TYPE	A	B	C	D	E	F	H	Nº of holes	Compression gland	Weight(kg)
ERM100/35	125						10	2		0,9
ERM150/35	175						10	3		1
ERM200/35	225						10	4		1,5
ERM400/35	425	35x0,3	34x0,1	25	50		12	8	PG-9	2,8
ERM500/35	525						12	10		3,5
ERM600/35	625						12	12		4,5
ERM150/60	180						40	70		2,3
ERM200/60	230						40	120		3
ERM500/60	530	60x0,1	49,5x0,2	40	70	12	M-8	2	PG-11	3
				70	120			4		7,8