




UNIPOLÁRNÍ SVORKOVNICE

ITB1000

ITB 80-7-W ŠEDÁ

- Izolačné teleso: PA 66 UL 94-V0
- Sivá RAL 7035 - Modrá RAL 5012 - Zelená RAL 6024
- Obal: PC UL 94-V0, transparentný žltý
- Vodivý blok: mosadz

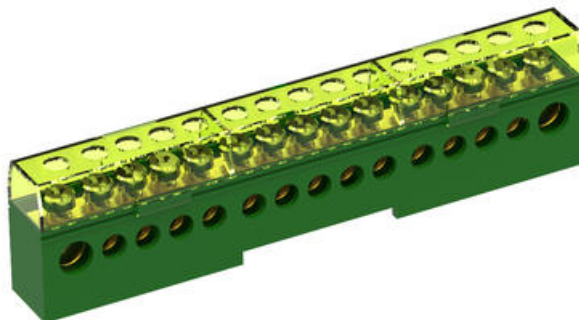

POPIS PRODUKTU

ŠPECIFIKÁCIA

Connections	7
Farba	Šedá
Height (H)	31 mm
Hmotnosť	46 g
Input A: diameter	7,5 mm
Input A: torque, max.	2 Nm
Input A: wire cross-section stranded, max.	16 mm ²
Input A: wire cross-section stranded, min.	4 mm ²
Input A: wire cross-section with wire-end ferrules, max.	16 mm ²
Input A: wire cross-section with wire-end ferrules, min.	2,5 mm ²
Input B: diameter	5,5 mm
Input B: torque, max.	1,5 Nm
Input B: wire cross-section stranded with wire-end ferrules, max.	6 mm ²
Input B: wire cross-section stranded, max.	6 mm ²
Input B: wire cross-section stranded, min.	2,5 mm ²
Input B: wire cross-section, stranded with wire-end ferrules, min.	1,5 mm ²
Length (L)	63 mm
Montáž	DIN lišta

Nominal insulation voltage	500 V
Nominálny prúd	80 A
Number of inputs A	2
Number of inputs B	5
Screw type	Galvanized steel screws
Šírka	15 mm

