



Dopyt

TERMOMETRE

Séria F73

F73-3904857

Termometer Ø100 0-60°C 90x13mm L=3m

- Plynové
- Teplota -200°C až 700°C
- Ø100, Ø160 mm
- Pripojenie kapilára
- ATEX, GOST, EAC




POPIS PRODUKTU


ŠPECIFIKÁCIA

Capillary diameter	2 mm
Capillary length	3000 mm
Insertion length	90 mm
Material Capillary	Nerezová oceľ 316Ti
Materiál kontaktnej časti	Nerezová oceľ 316
Materiál skla	Laminované bezpečnostné sklo
Materiál tela	Nezestavovaná oceľ 1,4301
Plug diameter	13 mm
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	0 °C
Priemer	100 mm
Teplota okolia do	60 °C
Teplota okolia od	-40 °C
Trieda krytia	IP65

Model F73, with capillary and instrument mounting bracket

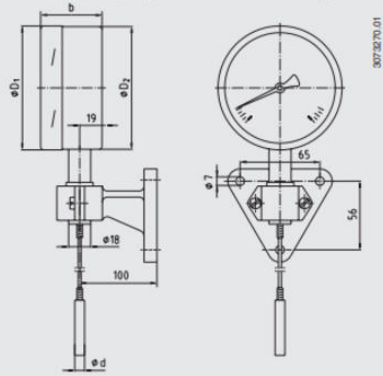


Model F73, with capillary and panel mounting flange

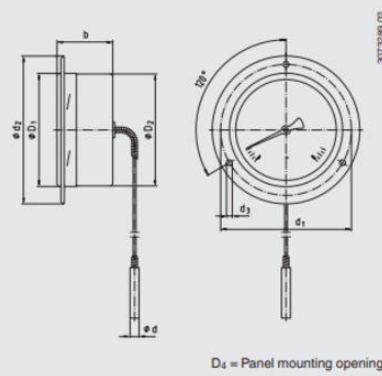


D_4 = Panel mounting opening


Model F73, with capillary and triangular bezel with clamp

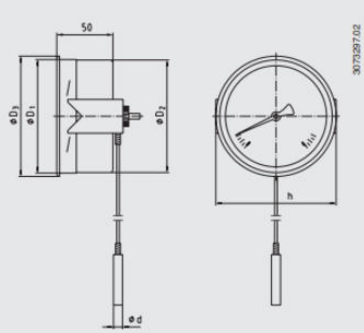


Model F73.100, with capillary and surface mounting flange




Model F73.160, with capillary and surface mounting flange

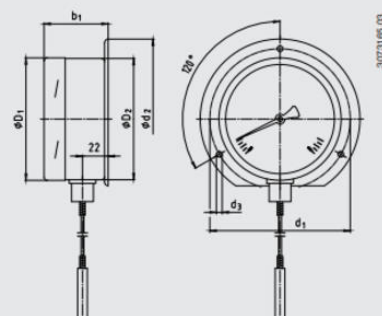

Model F73, with contact bulb
Capillary and instrument mounting bracket

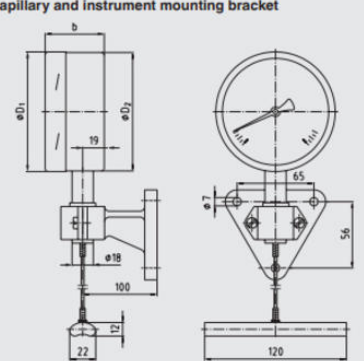


Model F73, with contact bulb
Capillary and panel mounting flange

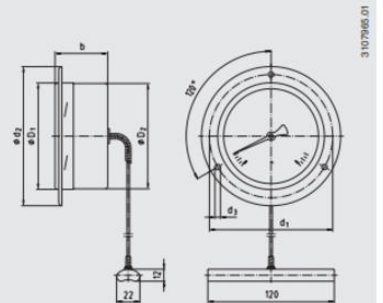


D_4 = Panel mounting opening

Model F73, with contact bulb
Capillary and triangular bezel with clamp

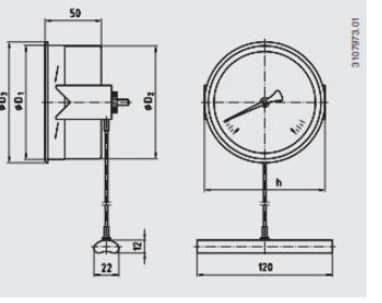

Model F73.100, with contact bulb
Capillary and surface mounting flange



Model F73.160, with contact bulb
Capillary and surface mounting flange

