



# LÜTZE 750539 MULTIFUNKČNÍ PŘEVODNÍK STANDARDNÍCH SIGNÁLŮ

Série 750539


750539

Signal Converter Stand.signaler 3-vägs




- Šířka 6,2 mm
- Volitelný vstupní a výstupní signál
- Galvanická izolace 1,5 kV
- Automatická kalibrace



## POPIS PRODUKTU

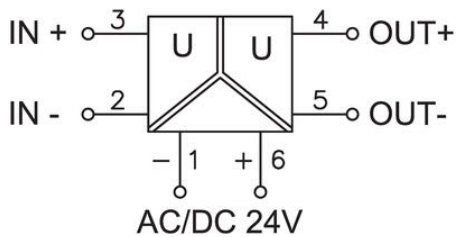

● -> Switch On		S1			
Input	Output	1	2	3	4
0-20 mA	0-10 V	●			
0-20 mA	0-20 mA	●	●		
0-20 mA	4-20 mA	●		●	
4-20 mA	0-10 V	●			●
4-20 mA	0-20 mA	●	●	●	
4-20 mA	4-20 mA	●	●		
0-10 V	0-10 V		●		●
0-10 V	0-20 mA			●	●
0-10 V	4-20 mA		●	●	●

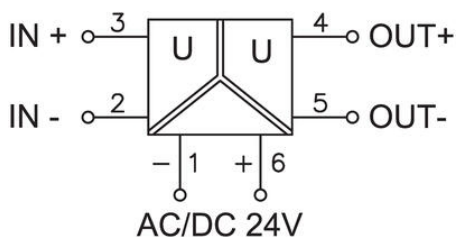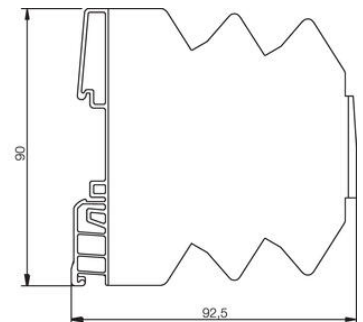

● -> Switch On		S1			
Input	Output	1	2	3	4
0-20 mA	0-10 V	●			
0-20 mA	0-20 mA	●	●		
0-20 mA	4-20 mA	●		●	
4-20 mA	0-10 V	●			●
4-20 mA	0-20 mA	●	●	●	
4-20 mA	4-20 mA	●	●		
0-10 V	0-10 V		●		●
0-10 V	0-20 mA			●	●
0-10 V	4-20 mA		●	●	●

