Dopyt

# SNÍMAČE TEPLOTY

Séria TC10-D

TC10D-14343189
Snímač teploty Typ K 0-1260 ° C 250x6mm JS bez závitu

- Termočlánky K, J, E, N, T
- Teplota -40 až 600°C
- Pripojenie M, NPT
- Médiá voda, plyny, oleje
- ATEX, IECEx

**POPIS PRODUKTU**

## ŠPECIFIKÁCIA

| | |
|---|---|
| **Insertion length** | 250 mm |
| **Materiál tela** | Hliník |
| **Plug diameter** | 6 mm |
| **Prevádzková teplota max.** | 1260 °C |
| **Prevádzková teplota min.** | -40 °C |
| **Teplota okolia do** | 80 °C |
| **Teplota okolia od** | -40 °C |
| **Trieda krytia** | IP65 |

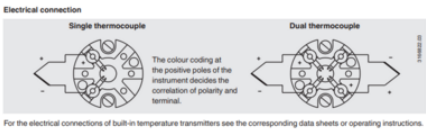


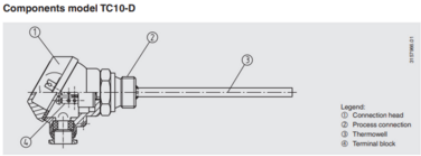


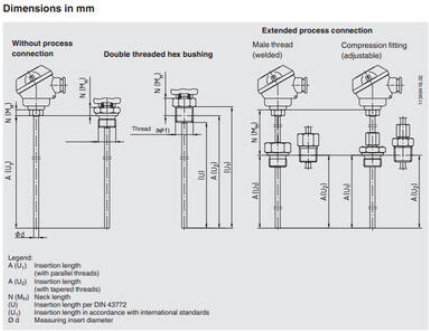

JS

| Model | Material | Cable entry thread size | Ingress protection (max.) [1] | Cap | Surface | Connection to neck tube |
|---|---|---|---|---|---|---|
| JS | Aluminium | M16 x 1.5 [2] | IP65 | Cover with 2 screws | Blue, lacquered [3] | M24 x 1.5, ½ NPT |

| Model | Explosion protection | | |
|---|---|---|---|
| | Without | Ex i (gas) Zone 0, 1, 2 | Ex i (dust) Zone 20, 21 |
| JS | x | x | x |

**Electrical connection**




For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.

**Components model TC10-D**

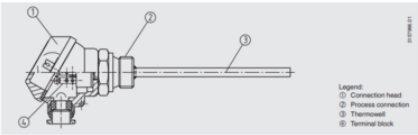


**Dimensions in mm**

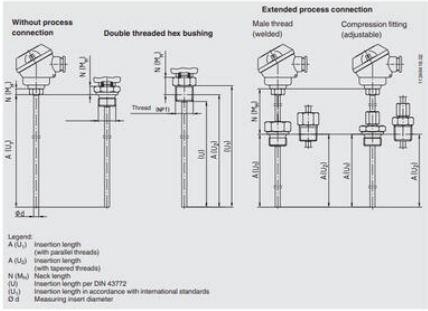

JS

| Model | Material | Cable entry thread size | Ingress protection (max.) [1] | Cap | Surface | Connection to neck tube |
|---|---|---|---|---|---|---|
| JS | Aluminium | M16 x 1.5 [2] | IP65 | Cover with 2 screws | Blue, lacquered [3] | M24 x 1.5, ½ NPT |

| Model | Explosion protection | | |
|---|---|---|---|
| | Without | Ex i (gas) Zone 0, 1, 2 | Ex i (dust) Zone 20, 21 |
| JS | x | x | x |