



BZUČIAKY SÉRIE ES * DO OTVORU Ø 22 MM

Série ES

812500313
ESK čierna siréna 230 V

- Pre vnútorné i vonkajšie použitie
- Nastaviteľná hlasitosť pomocou trimra (ESG a ESM)
- Až 3 druhy signalizácie (ESG)
- Montáž do otvoru Ø 22 mm (priamo) alebo 30 mm (s adaptérom)



POPIS PRODUKTU

Bzučiaky majú malé vonkajšie rozmery a dobré krytie, sú teda vhodné pre montáž na rozvádzač či dispečerský pult ako upozornenie obsluhy.

ŠPECIFIKÁCIA

Farba tela	Čierna
Frekvencia max	3500 Hz
Frekvencia min	50 Hz
Hladina zvuku max	65 dB
Hladina zvuku min	65 dB
Hmotnosť	30 g
Maximálny počet modulov	0 ks
Menovitý prúd max	0,035 A
Menovitý prúd min	0,035 A
Napájacie napätie AC max.	260 V AC
Napájacie napätie AC min.	150 V AC
Počet tónov	2 ks
Prevádzková teplota max.	60 °C
Prevádzková teplota min.	-25 °C
Priemer	30 mm

Prierez vodičov

2,5 mm²

Trieda krytia

IP65

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
100																						
200																						
500																						



The sound pressure decreases by 6 dB when doubling the distance.

The sound pressure decreases by 6 dB when doubling the distance

Tone table

Tone as heard		
La	N	Lb
X	X	pushing tone
X	X	continuous tone

ESK

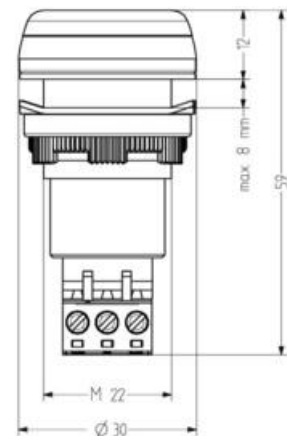

Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)



The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
100																						
200																						
500																						

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

